


Characteristics

(1) Dimensions are on DIN 3 rail : PR4 (Height 15 mm)
 Use of a PR3 rail : remove 7,5 mm on dimension B
 Use of a DIN 1 rail : remove 2,5 mm on dimension B
 remove 5 mm on dimension C



Screw clamp blocks


Type	Dimensions				Connection wire size				Electrical characteristics				Operating		Complementary information
	Spacing (mm)	A (mm)	B (mm)	C (mm)	Solid wire (AWG)	Stranded wire (AWG)	Input (AWG)	Output (AWG)	Current (A)	Rated voltage (V)	Pulse voltage (kV)	Wire stripping length (mm)	Recomm. screwdriver (mm)	Torque (Nm)	
MA 2.5/5	5	44.5	55.5	23	22 - 12	22 - 12			30	600	8	10	3.5	0.4 - 0.6	
M 4/6	6	44.5	55.5	23	24 - 10	24 - 10			30	600	8	9.5	4	0.5 - 0.8	
M 6/8	8	44.5	55.5	23	24 - 8	24 - 8			50	600	8	12	4 - 5	0.8 - 1	
M 10/10	10	44.5	55.5	23	22 - 6	22 - 6			65	600	8	12	5.5 - 6	1.2 - 1.4	
M 16/12	12	45.5	55.5	24	18 - 4	18 - 4			85	600	8	14	5.5	1.2 - 1.4	
M 35/16	16	49	61.5	27	10 - 0	10 - 0			150	600	8	17	6.5 - 7	2.8 - 3	
M 70/22	22	77.5	82.5	39.5	6 - 000	6 - 000			175	600	8	25	6**	6 - 7	
M 95/26	26	95.5	87	51	4 - 0000	4 - 0000			230	600	8	26	6**	8.5 - 9.5	
D 150/31.D10	31	119.5	122	60	—	—			Consult factory			12	35	8**	10-30
D 240/36.D10	36	119.5	132	60	—	—			Consult factory		8	35	10**	14-30	*Auxiliary output
MA 2.5/5.P	5	43.5	55.5	23	24 - 12	24 - 12			300 A/1s	—	—	10	3.5	0.4 - 0.6	
M 4/6.P	6	43.5	55.5	23	22 - 12	22 - 12			480 A/1s	—	—	9.5	4	0.5 - 0.8	
M 6/8.P	8	43.5	55.5	23	24 - 8	24 - 8			720 A/1s	—	—	12	4 - 5	0.8 - 1	
M 10/10.P	10	43.5	55.5	23	22 - 6	22 - 6			1200 A/1s	—	—	12	5.5 - 6	1.2 - 1.4	
M 16/12.P	12	49	55.5	27	18 - 4	18 - 4			1920 A/1s	—	—	14	5.5	1.2 - 1.4	
M 35/16.P	16	49	61.5	27	10 - 0	10 - 0			4200 A/1s	—	—	17	8	2.8 - 3	
M 70/22.P	22	74	82.5	39.5	6 - 000	6 - 000			8400 A/1s	—	—	25	6**	6 - 7	
M 95/26.P	26	87	87	46	0000	0000			11400 A/1s	—	26	6**	8.5 - 9.5	—	
MA 2.5/5.D2	5	65.5	67.5	38	24 - 12	24 - 12			20	600	8	9	3.5	0.4 - 0.6	
M 4/6.D2	6	65.5	67	38	24 - 10	24 - 10			20	600	8	8.5	4	0.5 - 0.8	
M 6/8.D2	8	88	81	51	24 - 8	24 - 8			50	600	8	12	4 - 5	0.8 - 1	
MA 2.5/5.SNB	5	44.5	59.5	23	22 - 12	22 - 12			10	600	4	10	3.5	0.4 - 0.6	
M 4/6.SNB	6	44.5	59.5	23	22 - 10	22 - 10			10	600	4	9.5	4	0.5 - 0.6	
M 6/8.SNB	8	47	59.5	25.5	22 - 10	22 - 10			20	600	8	12	4 - 5	0.8 - 1	
M 6/8.STP	8	55.5	64	30.5	20 - 8	20 - 8			40	600	—	11	4	0.8 - 1	
M 6/8.STA	8	61	64	33	22 - 8	22 - 8			30	600	—	11	5.5	0.8 - 1	
M 4/8.SF	8	56.5	56	31	22 - 12	22 - 12			10	600	8	9.5	4	0.5 - 0.8	
M 4/8.SFL	8	56.5	56	31	22 - 12	22 - 12			10	600	4	9.5	4	0.5 - 0.8	
M 4/8.SN	8	56.5	56	31	22 - 12	22 - 12			10	600	8	9.5	4	0.5 - 0.8	
ML 10/13.SF	13	85	73	46.5	22 - 10	22 - 10			25	600	8	12	5.5	1.2 - 1.4	
D 2.5/6.DA	6	81	58.5	36.5	20 - 12	20 - 12			20	300	—	6	3.5	0.4 - 0.6	
D 4/6.T3	6	90	79.5	43.5	24 - 10	24 - 10			20	300	6	9.5	4	0.5 - 0.8	
D 2.5/6.D	6	81	58.5	36.5	24 - 12	24 - 12			20	300	—	6	3.5	0.4 - 0.6	
D 2.5/6.DL	6	81	58.5	36.5	20 - 12	20 - 12			20	300	—	6	3.5	0.4 - 0.6	
D 2.5/6.DPA1	6	81	58.5	36.5	20 - 12	20 - 12			20	300	—	6	3.5	0.4 - 0.6	
M 4/6.3A	6	51.5	55.5	30	22 - 10	22 - 10			20	600	8	9.5	4	0.5 - 0.8	
M 4/6.4A	6	63.5	55.5	30	22 - 10	22 - 10			20	600	8	9.5	4	0.5 - 0.8	
M 4/8.D2.SF	8	85.7	74	47	24 - 12	24 - 12			10	300	8	9.5	4	0.5 - 0.8	
M 4/6.D2.SNBT	6	81	72.5	38	24 - 12	24 - 12			15	300	4	9.5	4	0.5 - 0.6	
M 4/6.D2.2S2	6	94.5	111	50.5	24 - 10	24 - 10			10	300	6	9.5	4	0.5 - 0.8	
D 4/6.T3.P	6	90	79.5	43.5	24 - 10	24 - 10			20	300	6	9.5	4	0.5 - 0.8	
MB 4/6.L...	6	44.5	55.5	23	22 - 10	22 - 10			20	600	8	9.5	4	0.5 - 0.8	
MB 4/6.P...	6	44.5	55.5	23	22 - 10	22 - 10			20	600	8	9.5	4	0.5 - 0.8	
MB 6/8.L...	8	44.5	55.5	23	22 - 8	22 - 8			65	600	8	12	4 - 5	0.8 - 1	
MB 6/8.P...	8	44.5	55.5	23	22 - 8	22 - 8			65	600	8	12	4 - 5	0.8 - 1	
MB 10/10.L	10	44.5	55.5	23	22 - 6	22 - 6			65	600	8	12	5.5 - 6	1.2 - 1.4	
MB 10/10.P	10	44.5	55.5	23	22 - 6	22 - 6			65	600	8	12	5.5 - 6	1.2 - 1.4	
BRU 125 A	27	75	57.5	29			10 - 2	14 - 6	115	600	—	—	4**	2 / 3.5	
BRU 160 A	35.2	91	60	41			8 - 00	14 - 6	160	600	—	—	5**	2 / 4	
BRU 250 A	44.5	96	59.5	37.4			2 - 0000	14 - 4	230	600	—	—	6**	2 / 3.5 / 19	
BRU 400 A	44.5	96	59.5	37.4			000 - 350	14 - 2	310	600	—	—	8**	2 / 3.5 / 25	
BRT 80 A	88	85	60	42			6	8	65	600	—	—	—	—	
BRT 125 A	128	85	60	42			2	8 - 6	65	600	—	—	—	—	
BRT 160 A	160.5	91	59.5	41			0	14 - 2	160	600	—	—	—	—	

(2) : Wire size comply with CEI 60947 - 7 - 1 standard.

** : Allen key 6 flats hollow

Characteristics

(1) Dimensions are on DIN 3 rail : PR4 (Height 15 mm)
 Use of a PR3 rail : remove 7,5 mm on dimension B
 Use of a DIN 1 rail : remove 2,5 mm on dimension B
 remove 5 mm on dimension C

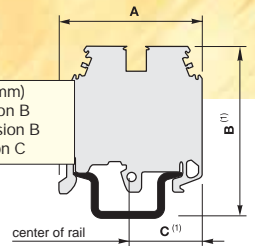


Spring clamp blocks

Type	Dimensions			Connection wire size		Electrical characteristics			Operating		
	Spacing (mm)	A (mm)	B (mm)	C (mm)	Solid wire (AWG)	Stranded wire (AWG)	Current (A)	Rated voltage (V)	Pulse voltage (kV)	Wire stripping length (mm)	Recomm. screwdriver (mm)
D 2.5/5.2L	5	58	45.5	29	26 - 12	26 - 12	15	600	8	9.5	3.5
D 2.5/5.3L	5	69	45.5	40	26 - 12	26 - 12	15	600	8	9.5	3.5
D 2.5/5.4L	5	80	45.5	40	26 - 12	26 - 12	15	600	8	9.5	3.5
D 4/6.2L	6	62.5	45.5	31.5	24 - 10	24 - 10	25	600	8	11	4
D 4/6.3L	6	78.5	39	39.5	24 - 10	24 - 10	25	600	8	11	4
D 4/6.4L	6	94.5	39	47.5	24 - 10	24 - 10	25	600	8	11	4
D 6/8.2L	8	67	45.5	33.5	22 - 8	22 - 8	40	600	8	12.5	5.5
D 10/10.2L	10	77.5	43	43.5	20 - 6	20 - 6	50	600	8	12	5.5
D 16/12.2L	12	93	58.5	46.5	20 - 6	20 - 6	54	600	8	—	5.5
D 35/16.2L	16	116	65.5	58	14 - 2	14 - 2	93	600	8	—	6.5
D 2.5/5.P.2L	5	58	45.5	29	26 - 12	26 - 12	300A/1s	—	—	9.5	3.5
D 2.5/5.P.3L	5	69	45.5	40	26 - 12	26 - 12	300A/1s	—	—	9.5	3.5
D 2.5/5.P.4L	5	80	45.5	40	26 - 12	26 - 12	300A/1s	—	—	9.5	3.5
D 4/6.P.2L	6	62.5	45.5	31.5	24 - 10	24 - 10	480A/1s	—	—	11	4
D 4/6.P.3L	6	78.5	39	39.5	24 - 10	24 - 10	480A/1s	—	—	11	4
D 4/6.P.4L	6	94.5	39	47.5	24 - 10	24 - 10	480A/1s	—	—	11	4
D 6/8.P.2L	8	67	45.5	33.5	22 - 8	22 - 8	720A/1s	—	—	12.5	5.5
D 10/10.P.2L	10	77.5	43	43.5	20 - 6	20 - 6	1200A/1s	—	—	12	5.5
D 16/12.P.2L	12	93	58.5	46.5	20 - 6	20 - 6	1920A/1s	—	—	—	5.5
D 35/16.P.2L	16	116	65.5	58	14 - 2	14 - 2	4200A/1s	—	—	—	6.5
D 2.5/5.D2.L	5	95	64	49	26 - 12	26 - 12	20	300	6	9.5	3.5
D 2.5/5.SNBT.2L	5	58	51.5	29	26 - 12	26 - 12	8	600	6	9.5	3.5
D 2.5/5.SNBT.4L	5	80	51.5	40	26 - 12	26 - 12	8	600	6	9.5	3.5
D 2.5/8.SFT.2L	8	80	60.5	40	26 - 12	26 - 12	8	600	8	9.5	3.5
D 2.5/8.SF..T.2L	8	80	60.5	40	26 - 12	26 - 12	8	600	8	9.5	3.5
D 2.5/8.SNT.2L	8	80	60.5	40	26 - 12	26 - 12	8	600	8	9.5	3.5
D 2.5/5 C3.L	5	79	56	37.5	26 - 16	26 - 16	10	300	4	9.5	3.5
D 2.5/5 C4.L	5	95	56	37.5	26 - 16	26 - 16	10	300	4	9.5	3.5
D 2.5/5.I.3L	5	55	56.5	27.5	26 - 12	26 - 12	15	600	8	9.5	3.5
D 2.5/5.I.4L	5	55	56.5	27.5	26 - 12	26 - 12	15	600	8	9.5	3.5
D 2.5/5.I.P.3L	5	55	56.5	27.5	26 - 12	26 - 12	300A/1s	—	—	9.5	3.5
D 2.5/5.I.P.4L	5	55	56.5	27.5	26 - 12	26 - 12	300A/1s	—	—	9.5	3.5
D 1.5/4.2L	4	58	45.5	29	26 - 16	26 - 16	15	600	8	9.5	2.5
D 1.5/4.4L	4	80	45.5	40	26 - 16	26 - 16	15	600	8	9.5	2.5
D 1.5/4.P.2L	4	58	45.5	29	26 - 16	26 - 16	180A/1s	—	—	9.5	2.5
D 1.5/4.P.4L	4	80	45.5	40	26 - 16	26 - 16	180A/1s	—	—	9.5	2.5

Characteristics

(1) Dimensions are on DIN 3 rail : PR4 (Height 15 mm)
 Use of a PR3 rail : remove 7,5 mm on dimension B
 Use of a DIN 1 rail : remove 2,5 mm on dimension B
 remove 5 mm on dimension C

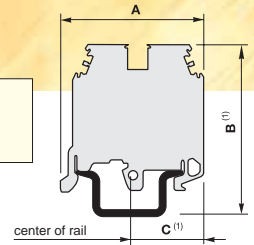

ADO blocks

Type	Spacing (mm)	Dimensions			Connection wire size				Current (A)	Electrical characteristics			Operating	
		A (mm)	B (mm)	C (mm)	Solid wire (AWG) screw clamp	Stranded wire (AWG) screw clamp	Solid wire A.D.O. (AWG)	Stranded wire A.D.O. (AWG)		Rated voltage (V)	Pulse voltage (kV)	Wire stripping length (mm) ①	Recomm. screwdriver (mm)	Torque (Nm)
D 2.5/5.ADO	5	45	56	23	22 - 12	22 - 12	24 - 18	24 - 18	7	600	8	9.5	3.5	0.4 - 0.6
D 4/6...ADO	6	45	56	23	24 - 10	24 - 10	22 - 16	22 - 16	18	600	8	9.5	4	0.5 - 0.8
D 6/8...ADO	8	45	56	23	24 - 8	24 - 8	14 - 12	14 - 12	25	600	8	12	4 - 5	0.8 - 1
D 6/8.ADO3	8	45	56	23	24 - 8	24 - 8	14 - 12	14 - 12	30	600	8	12	4 - 5	0.8 - 1
D 1/5.ADO	5	45.5	56	24	—	—	24 - 18	24 - 18	7	600	8	—	—	—
D 1.5/6...ADO	6	45.5	56	24	—	—	22 - 16	22 - 16	18	600	8	—	—	—
D 2.5/8...ADO	8	45.5	56	24	—	—	16 - 14	16 - 14	25	600	8	—	—	—
D 4/8...ADO	8	45.5	56	24	—	—	14 - 12	14 - 12	25	600	8	—	—	—
D 2.5/5.PADO	5	50	56	25	22 - 12	22 - 12	24 - 18	24 - 18	120A/1s	—	—	9.5	3.5	0.4 - 0.6
D 4/6.PADO	6	50	56	25	22 - 10	22 - 10	22 - 16	22 - 16	180A/1s	—	—	9.5	4	0.5 - 0.8
D 6/8.PADO	8	50	56	25	22 - 8	22 - 8	16 - 14	16 - 14	300A/1s	—	—	12	4 - 5	0.8 - 1
D 6/8.PADO3	8	50	56	25	22 - 8	22 - 8	14 - 12	14 - 12	480A/1s	—	—	12	4 - 5	0.8 - 1
D 1/5.PADO	5	50	56	25	—	—	24 - 18	24 - 18	120A/1s	—	—	—	—	—
D 1.5/6.PADO	6	50	56	25	—	—	22 - 16	22 - 16	180A/1s	—	—	—	—	—
D 2.5/8.PADO	8	50	56	25	—	—	16 - 14	16 - 14	300A/1s	—	—	—	—	—
D 4/8.PADO	8	50	56	25	—	—	14 - 12	14 - 12	480A/1s	—	—	—	—	—
D 4/6.D2.ADO	6	85.5	83	45	22 - 10	22 - 10	22 - 6	22 - 6	7	300	6	9.5	4	0.5 - 0.8
D 6/8.D2.ADO	8	85.5	83	45	Consult factory	Consult factory	Consult factory	Consult factory	—	—	8	12	4 - 4.5	0.8 - 1
D 1.5/6.D2.ADO	6	93	83	52.5	Consult factory	Consult factory	22 - 16	22 - 16	18	300	6	—	—	—
D 2.5/5.SN.ADO	5	55	59.5	22 - 12	22 - 12	24 - 18	24 - 18	5	300	4	9.5	3.5	0.4 - 0.6	—
D 4/6.SN.ADO	6	55	59.5	23	22 - 10	22 - 10	22 - 16	22 - 16	10	600	6	9.5	4	0.5 - 0.8
D 4/8.SN.ADO	8	55	59.5	23	22 - 10	22 - 10	16 - 14	16 - 14	15	600	6	9.5	4	0.5 - 0.8
D 1/5.SNT2.ADO	5	68.5	59.5	37	—	—	24 - 18	24 - 18	5	300	4	—	—	—
D 1.5/6.SNT2.ADO	6	68.5	59.5	37	—	—	22 - 16	22 - 16	8	600	6	—	—	—
D 2.5/8.SNT2.ADO	8	68.5	59.5	37	—	—	16 - 14	16 - 14	15	600	6	—	—	—
D 4/8.SF.I.ADO	8	68.5	94	25.5	22 - 10	22 - 10	22 - 16	22 - 16	10	600	8	9.5	4	0.5 - 0.8
D 4/8.SNN.I.ADO	8	68.5	94	56	22 - 10	22 - 10	16 - 14	16 - 14	10	600	8	9.5	4	0.5 - 0.8
D 4/8.SF.I.ADO2	8	68.5	66	25.5	22 - 10	22 - 10	16 - 14	16 - 14	10	600	8	9.5	4	0.5 - 0.8
D 4/8.SNN.I.ADO2	8	68.5	56	25.5	22 - 10	22 - 10	16 - 14	16 - 14	10	600	8	9.5	4	0.5 - 0.8
D 1.5/8.SFT.ADO	8	80.5	56	43	—	—	22 - 16	22 - 16	8	600	8	—	—	—
D 1.5/8.SNNT.ADO	8	80.5	56	43	—	—	16 - 14	16 - 14	10	600	8	—	—	—
D 2.5/8.SFT.ADO2	8	80.5	56	43	—	—	16 - 14	16 - 14	10	600	8	—	—	—
D 2.5/8.SNNT.ADO2	8	80.5	56	43	—	—	16 - 14	16 - 14	10	600	8	—	—	—
D 1/5.C2.ADO	5	51	76.5	23	Consult factory	Consult factory	Consult factory	Consult factory	13.5	250	8	—	—	—
D 1/5.C3.ADO	5	67.5	76.5	48	Consult factory	Consult factory	Consult factory	Consult factory	13.5	250	8	—	—	—
D 1/5.C4.ADO	5	80	97	48	Consult factory	Consult factory	Consult factory	Consult factory	13.5	250	8	—	—	—


Power terminal blocks

Type	Spacing (mm)	Dimensions			Connection wire size				Rated current (A)	Electrical characteristics			Operating	
		A (mm)	B (mm)	C (mm)	Solid wire lug (AWG)	Stranded wire lug (AWG)	Solid wire screw clamp (AWG)	Stranded wire screw clamp (AWG)		Rated voltage (V)	Pulse voltage (kV)	Wire stripping length (mm)	Clamping Key (mm)	Torque (Nm)
D 35/27.FF	27	113	66.5	56.5	1	1	—	—	125	600	8	—	H 10	3
D 70/32.FF	32	140	74.5	70	000	000	—	—	170	600	8	—	H 13	6
D 120/42.FF	42	140	84	70	300 MCM	300 MCM	—	—	269	600	8	—	H 17	10
D 185/55.FF	55	163	97.5	81.5	500 MCM	500 MCM	—	—	353	600	8	—	H 19	14
D 300/55.FF	55	163	106.5	81.5	1000 MCM	1000 MCM	—	—	460	600	8	—	H 24	25
D 35/27.AF	27	136.5	90	56.5	—	12 - 1	—	12 - 1	130	600	8	28	H 10 / 5 ②	3 / 3
D 70/32.AF	32	165	113.5	70	—	10 - 000	—	10 - 000	165	600	8	33	H 13 / 6 ②	6 / 8
D 120/42.AF	42	197	137.5	70	—	10 - 300 MCM	—	10 - 300 MCM	240	600	8	38	H 17 / 8 ②	10 / 10
D 185/55.AF	55	228.5	159.5	81.5	—	4 - 500 MCM	—	4 - 500 MCM	320	600	8	47	H 19 / 10 ②	14 / 14

① Wire size comply with CEI 60947 - 7 - 1 standard.
 ② Allen key 6 flats hollow

Characteristics

(1) Dimensions are on DIN 3 rail : PR4 (Height 15 mm)
 Use of a PR3 rail : remove 7,5 mm on dimension B
 Use of a DIN 1 rail : remove 2,5 mm on dimension B
 remove 5 mm on dimension C

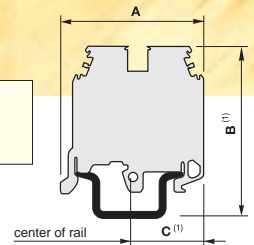

Miniblocks

Type	Spacing (mm)	Dimensions			Connection wire size					Electrical characteristics			Operating	
		A (mm)	B (mm)	C (mm)	Solid wire (AWG) screw clamp/spring	Stranded wire (AWG) screw clamp/spring	Solid wire A.D.O. (AWG)	Stranded wire A.D.O. (AWG)	Current (A)	Rated voltage (V)	Pulse voltage (kV)	Wire stripping length (mm) ⁽²⁾	Recomm. screwdriver (mm)	Torque (Nm) ⁽²⁾
DR 1.5/4	4	28	31	14	24 - 16	24 - 16	—	—	10	300	6	7	2.5	—
DR 1.5/5.1	5	27.5	25	14	28 - 12	28 - 12	—	—	20	300	—	8.5	3.5	0.4 - 0.6
DR 4/6.1	6	28	31	14	18 - 12	18 - 12	—	—	20	250	—	9.5	4	0.5 - 0.8
DR 4/6.P	6	28	31	14	18 - 12	18 - 12	—	—	480 A/1s	—	—	9.5	4	0.5 - 0.8
DR 2.5/5.2L	5	33	30	16.5	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DR 2.5/10.4L	10	33	30	16.5	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DS 2.5/5.2L	5	38	39.5 ①	19	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DS 2.5/10.4L	10	38	39.5 ①	19	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DH 2.5/5.2L	5	33	24.5 ②	16.5	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DH 2.5/10.4L	10	33	24.5 ②	16.5	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DB 2.5/5.2L	5	33	24.5 ②	16.5	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DB 2.5/10.4L	10	33	24.5 ②	16.5	26 - 12	26 - 12	—	—	15	600	8	9.5	3.5	—
DR 2.5/10.P.4L	10	33.5	30	16.5	26 - 12	26 - 12	—	—	300 A/1s	—	—	9.5	3.5	—
DR 4/6.ADO	6	31	33.5	15.5	22 - 10	22 - 10	22 - 16	22 - 16	20	600	8	9.5	4	0.5 - 0.8
DR 1.5/6.ADO	6	31	33.5	15.5	—	—	22 - 16	22 - 16	20	600	8	—	—	—
DR 4/8.ADO	8	31	33.5	15.5	22 - 10	22 - 10	16 - 14	16 - 14	25	600	8	9.5	4	0.5 - 0.8
DR 2.5/8.ADO	8	31	33.5	15.5	—	—	16 - 14	16 - 14	25	600	8	—	—	—
DS 4/6.ADO	6	42.5	43 ①	20.5	22 - 10	22 - 10	22 - 16	22 - 16	20	600	8	9.5	4	0.5 - 0.8
DS 1.5/6.ADO	6	42.5	43 ①	20.5	—	—	22 - 16	22 - 16	20	600	8	—	—	—
DS 4/8.ADO	8	42.5	43 ①	20.5	22 - 10	22 - 10	16 - 14	16 - 14	25	600	8	9.5	4	0.5 - 0.8
DS 2.5/8.ADO	8	42.5	43 ①	20.5	—	—	16 - 14	16 - 14	25	600	8	—	—	—
DH 4/6.ADO	6	31	28 ②	15.5	22 - 10	22 - 10	22 - 16	22 - 16	20	600	8	9.5	4	0.5 - 0.8
DH 1.5/6.ADO	6	31	28 ②	15.5	—	—	22 - 16	22 - 16	20	600	8	—	—	—
DH 4/8.ADO	8	31	28 ②	15.5	22 - 10	22 - 10	16 - 14	16 - 14	25	600	8	9.5	4	0.5 - 0.8
DH 2.5/8.ADO	8	31	28 ②	15.5	—	—	16 - 14	16 - 14	25	600	8	—	—	—
DB 4/6.ADO	6	31	28 ②	15.5	22 - 10	22 - 10	22 - 16	22 - 16	20	600	8	9.5	4	0.5 - 0.8
DB 1.5/6.ADO	6	31	28 ②	15.5	—	—	22 - 16	22 - 16	20	600	8	—	—	—
DB 4/8.ADO	8	31	28 ②	15.5	22 - 10	22 - 10	16 - 14	16 - 14	25	600	8	9.5	4	0.5 - 0.8
DB 2.5/8.ADO	8	31	28 ②	15.5	—	—	16 - 14	16 - 14	25	600	8	—	—	—
DR 4/8.P.ADO	8	32	33	15.5	22 - 10	22 - 10	16 - 14	16 - 14	300 A/1s	—	—	9.5	4	0.5 - 0.8
DR 2.5/8.P.ADO	8	32	33	15.5	—	—	16 - 14	16 - 14	300 A/1s	—	—	—	—	—

① DIN 3
 ② Dimension above the panel.

Rail mounted outlet



Selection table

Description	Part/number
DIN rail mounted duplex outlet	1SNA892461R1500

Technical data

Electrical ratings

Volts: 125
 Amps: 15 Amps Max.
 Wire range: 18-14 AWG
 Clamp torque: 3.5 - 5.3 lb. in. (0.4 - 0.6 Nm)

DIN rail mounting compatibility

Din 3 only

Materials information reference

Housing: 25% glass reinforced PA6/66 V0
 Connectors: Chromium Oxide plated steel
 Operating temperatures: -40°C MIN +70°C MAX
 Flammability specs: Halogen-free, UL rated 94 V0
 Ingress protection: IP20

Configuration

NEMA 5-15R

Color

Ivory

Approvals

UL

Approximate dimensions - (mm [in])

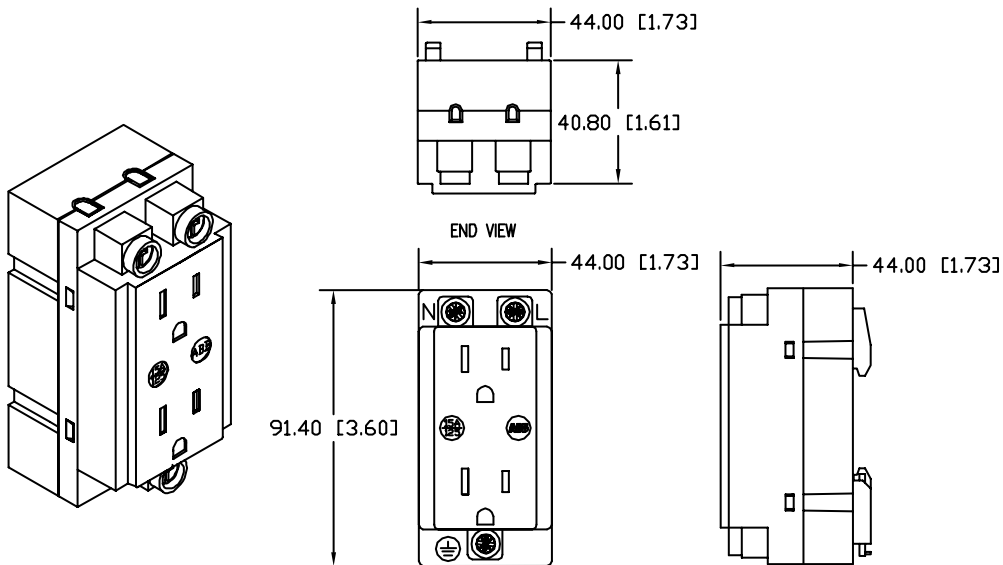




ABB Inc.
1206 Hatton Road
Wichita Falls, TX 76302
Telephone 888-385-1221; 940-397-7000
Fax 940-397-7085
<http://www.abb-control.com>

Publication
No. 1SXU 160 005 B0201 (LV005)
Printed in USA, October, 2004