



TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER


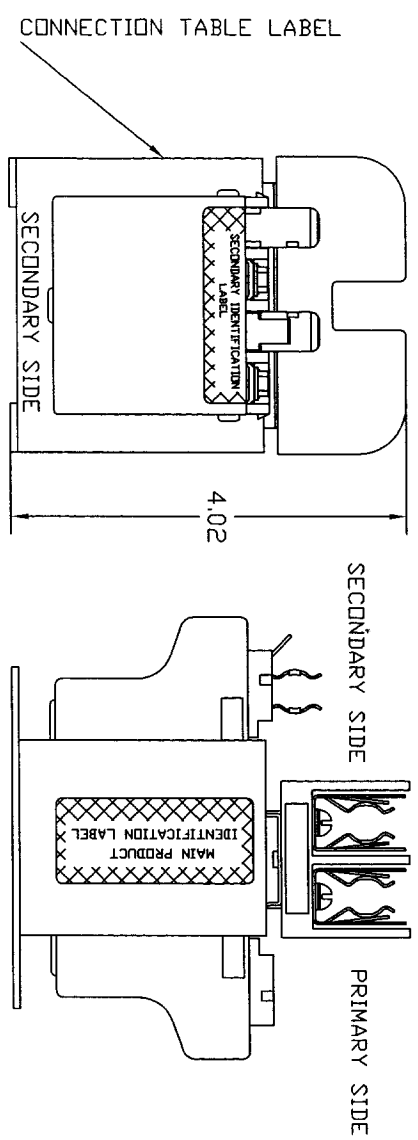


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	4.3 LBS



NOTE:  
 1. TORQUE CONNECTIONS TO 16 LB-IN  
 2. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"

PRIMARY IDENTIFICATION LABEL  
 SECONDARY IDENTIFICATION LABEL  
 CONNECTION TABLE LABEL

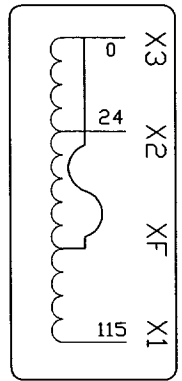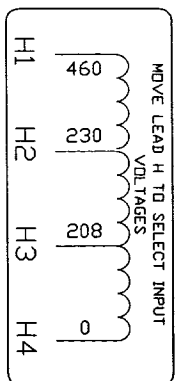

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3	H4-H1
240	480
208	230
200	220
	440
	23
	110

NOTE: IF WITH OUTPUTS ARE USED SIMULTANEOUSLY, TORQUE SHOULD BE DONE BY "X" INSTRUCTIONS WITH IN REPAIRING "P"

**MICRON** CONTROL TRANSFORMER

**MICRON INDUSTRIES CORPORATION**  
 777 CHURCH ROAD - ELMHURST, IL 60126  
 Tel: (800)564-4650 Fax: (630)516-1820  
 www.microntransformers.com

DATE: 1/15/08  
 RELEASE DATE: J.G.V.  
 DRAWN: J.G.V.  
 CHECKED: APPROVED:

SCALE: NONE  
 SIZE: A

OUTLINE DRAWING  
 B050-0416-8