
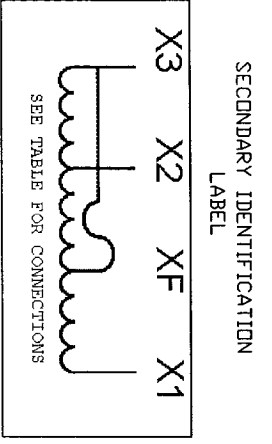
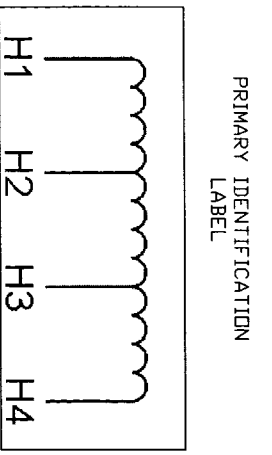



Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	5.5 LBS

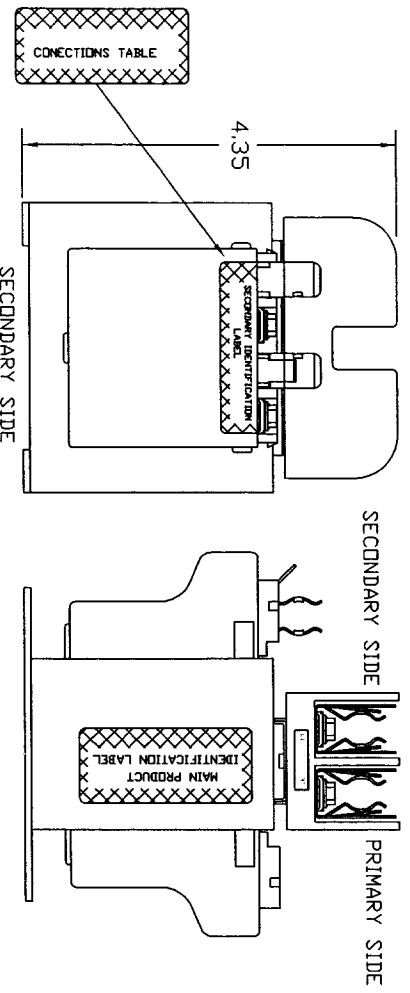

CONNECTIONS TABLE LABEL

INPUT VOLTAGE	OUTPUT VOLTAGE
H4H3	XF-X1
240	25
230	24
460	23
220	115
440	110

NOTE: IF BOTH OUTPUTS ARE USED, SIMULTANEOUSLY FUSING SHOULD BE DONE ON ONE OF THE TRANSFORMER WITH X3 REPLACING XF



- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
  2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"

**MICRON INDUSTRIES CORPORATION**  
 17000 BIRCH ROAD  
 LEBANON, OH 45031  
 Tel. (500)554-1521 Fax (530)518-1850  
 www.microntransformers.com

**MICRON**

DATE: 1/15/08  
 RELEASE DATE: \_\_\_\_\_  
 DRAWN: J.G.V.  
 CHECKED: \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

OUTLINE DRAWING

SIZE: A  
 SCALE: NONE

B075-0417-8