


CONNECTION TABLE LABEL

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3 240	H4-H1 120
H4-H2 230	XF-X2 24
H4-H1 460	XF-X1 115
208	23
200	110

NOTE: IF BOTH OUTPUTS ARE USED SHALTIMAN'S FUSING SHOULD BE DONE BY THE TRANSFORMER WITH 13 REPLACING XF

Transformer Specifications

PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V/A	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	8.5 LBS

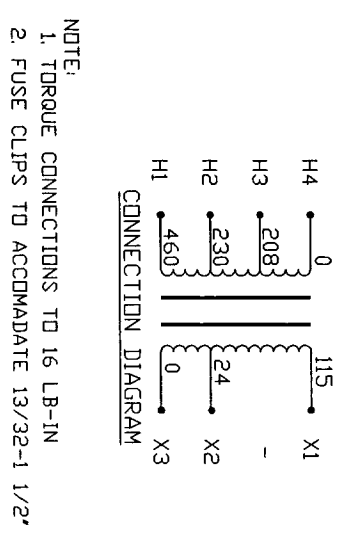

MICRON CONTROL TRANSFORMER

MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD, ELMHURST, IL 60126
 TEL. (800)864-4650, (630)516-1622 FAX (630)516-1620
 WWW.MICRONTRANSFORMER.COM

DATE: 1/15/08 DRAWN: J.G.V. CHECKED: APPROVED:

RELEASE DATE: CUST. P/N:

SIZE: A SCALE: NONE

OUTLINE DRAWING

B150-0419-8F