


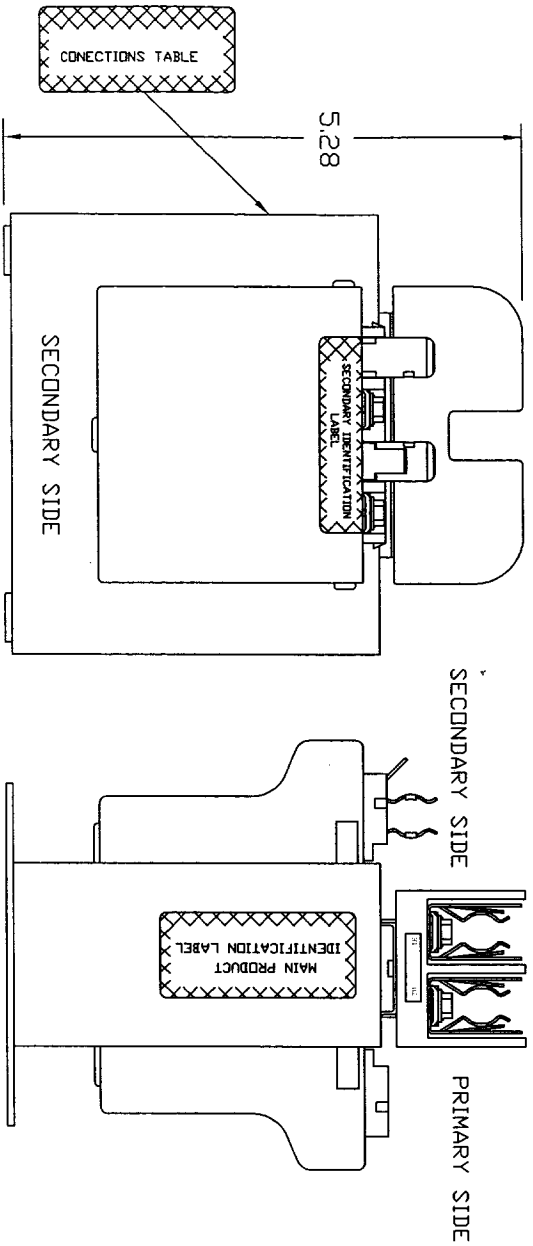


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	200
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	9.5 LBS

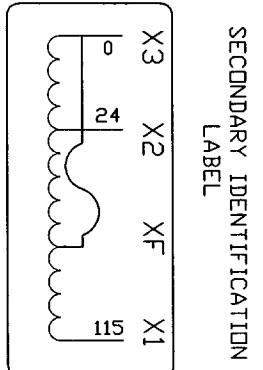

NOTE:  
 1. TORQUE CONNECTIONS TO 16 LB-IN  
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"

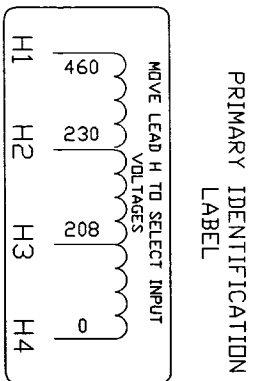

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3 240	H4-H1 120
H4-H2 230	XF-X2 24
H4-H1 460	XF-X1 115
208	
200	
220	
440	

NOTE: IF BOTH OUTPUTS ARE USED, SHIELD TERMINALS BY TIGHTENING WITH 13/32-1 1/2" SCREWS TO SOME OF THE TERMINALS WITH 13/32-1 1/2" NUTS.

**MICRON** MICRON INDUSTRIES CORPORATION  
 CONTROL TRANSFORMER 777 CHURCH ROAD - ELMHURST, IL 60126  
 Tel. (800)564-4660, (630)516-1822 Fax (630)516-1820  
 www.MicronTransformers.com

DATE 1/15/08 DRAWN J.G.V. CHECKED APPROVED  
 RELEASE DATE CUST. P/N

OUTLINE DRAWING  
 B200-0420-8F

SIZE SCALE A NONE