

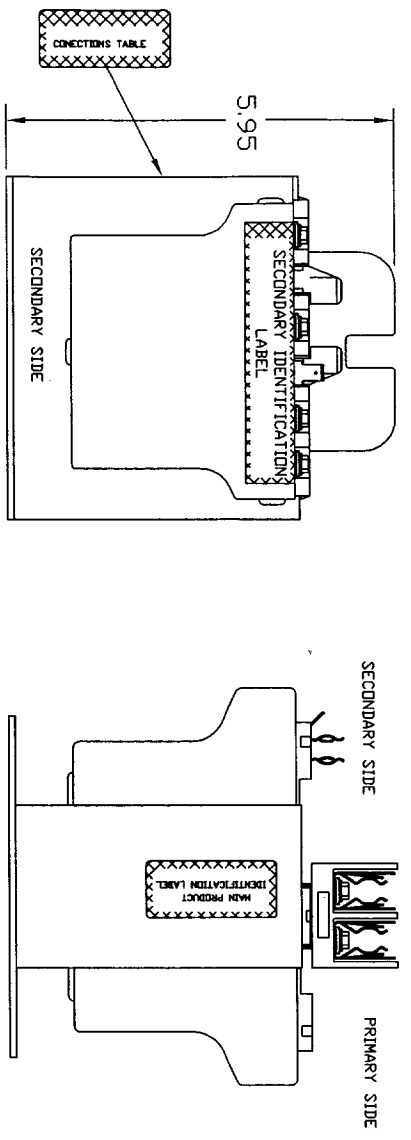
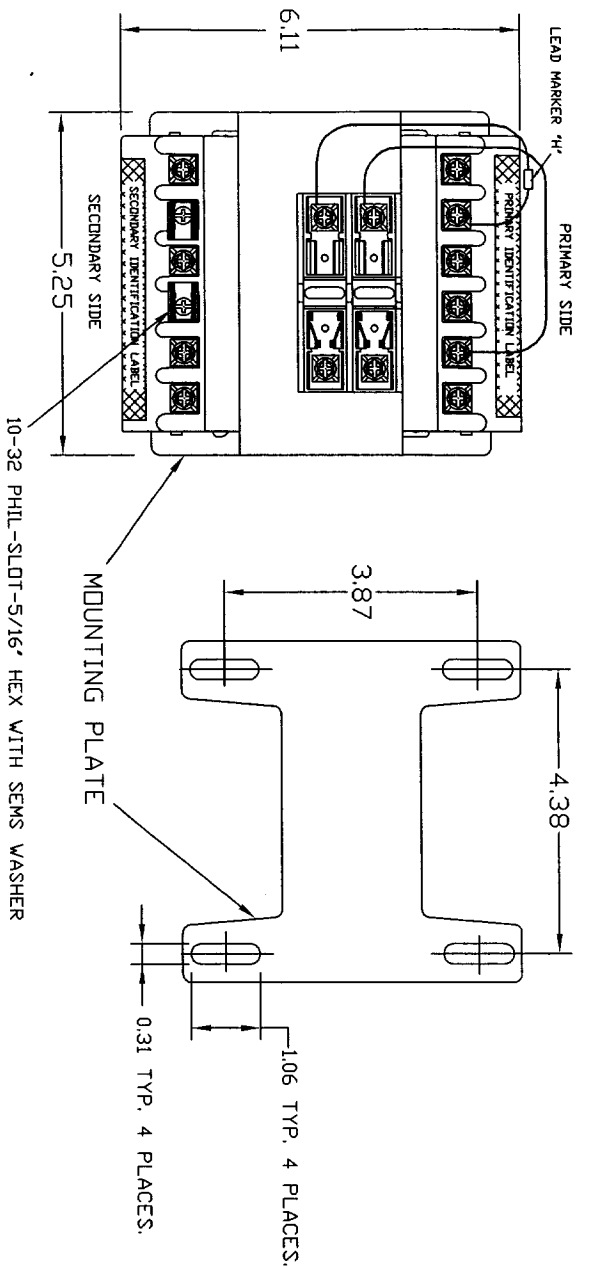



Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	300
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	14.1 LBS



NOTE:
 1. TORQUE CONNECTIONS TO 30 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"



PRIMARY IDENTIFICATION LABEL



SECONDARY IDENTIFICATION LABEL

INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3	XF-X2
460	24
H4-H2	XF-X1
230	115
H4-H1	23
208	110
200	

NOTE: IF BOTH OUTPUTS ARE USED, THE TRANSFORMER RATING SHALL BE 1/2 THE RATED OUTPUT OF THE TRANSFORMER WITH 25% OVERLOADING AT 100% DUTY.

CONNECTION TABLE LABEL

MICRON CONTROL TRANSFORMER

MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD - ELMHURST, IL 60126
 Tel. (800)564-4660, (630)516-1222 Fax (630)516-1820
 www.MicronTransformers.com

DATE: 1/15/08
 RELEASE DATE: _____
 DRAWN: J.G.V.
 CHECKED: _____
 APPROVED: _____

OUTLINE DRAWING

B300-0422-8F

SIZE	SCALE
A	NONE