
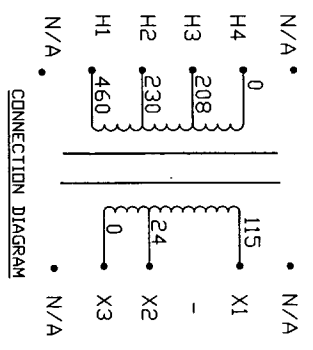
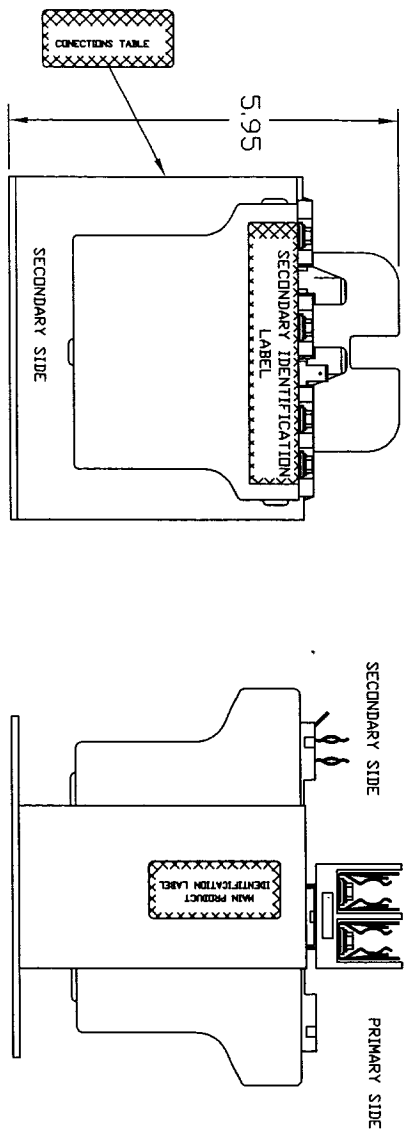


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	16.5 LBS


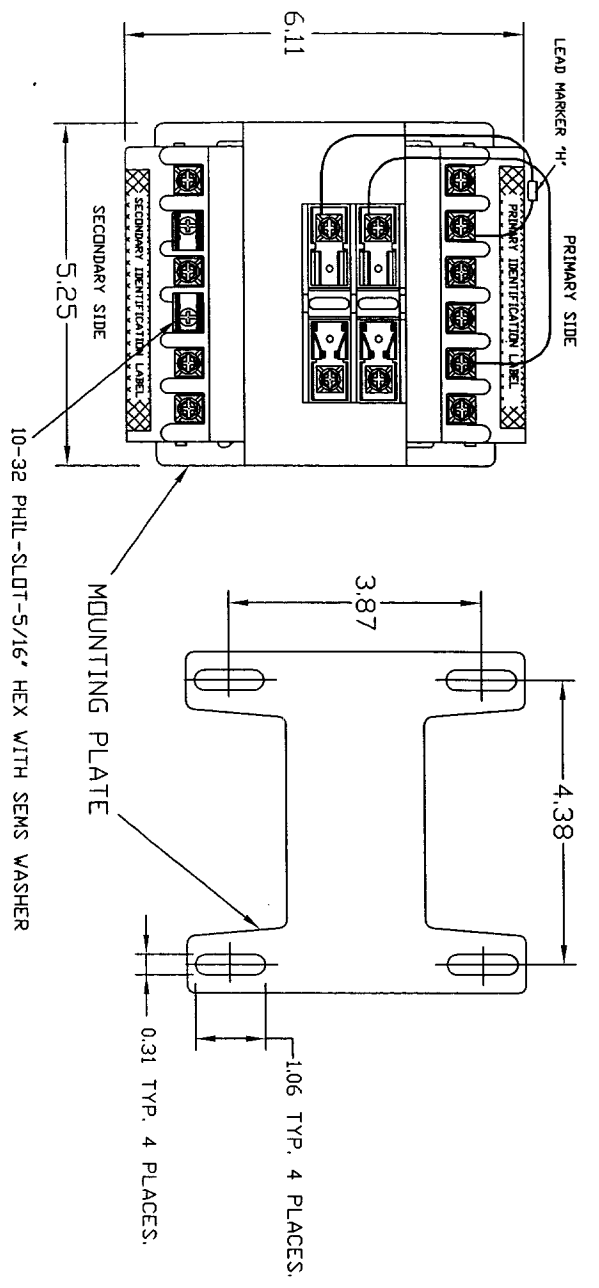


NOTE:
 1. TORQUE CONNECTIONS TO 30 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

CONNECTION TABLE LABEL



INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3	XF-X2
H4-H2	X1
H4-H1	
240	25
480	120
208	24
460	115
230	23
440	110

MICRON CONTROL TRANSFORMER

MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD, ELMHURST, IL 60126
 TEL: (800)864-4650 / (630)516-1820
 WWW.MICRONTRANSFORMER.COM

DATE: 1/15/08
 RELEASE DATE: _____
 DRAWN: J.G.V.
 CHECKED: _____
 APPROVED: _____

OUTLINE DRAWING

SIZE: A
 SCALE: NONE

B350-0423-8F