

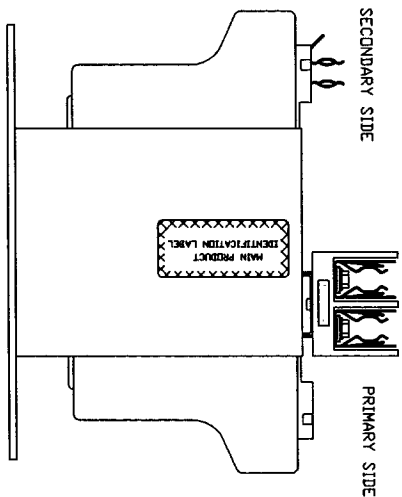
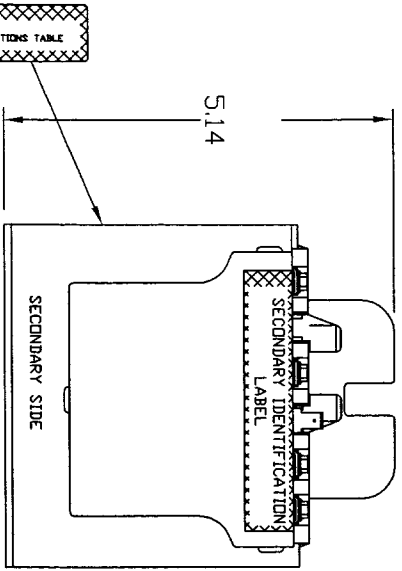
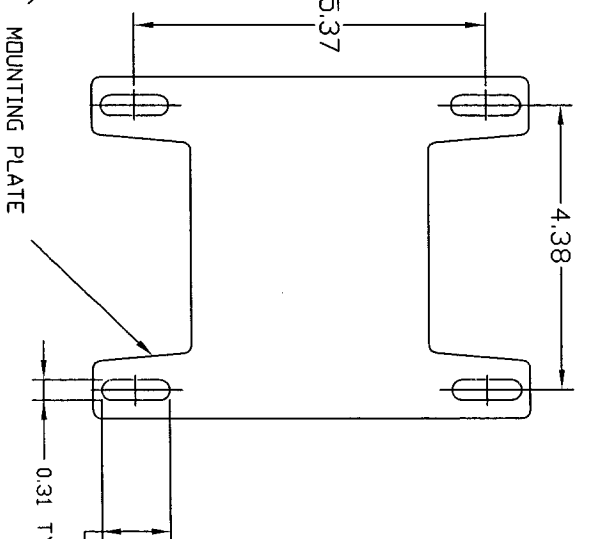


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	500
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	23.1 LBS

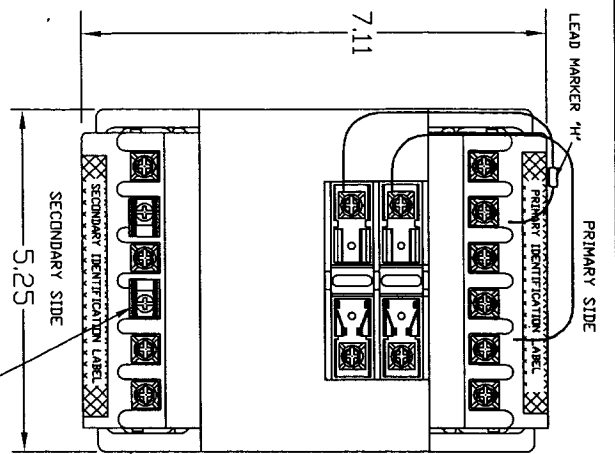



10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER



NOTE:
 1. TORQUE CONNECTIONS TO 30 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL



INPUT VOLTAGE	OUTPUT VOLTAGE
H4-H3	XF-X2
H4-H2	H4-H1
240	480
208	460
230	460
220	440
	23
	110

MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD - ELMHURST, IL 60126
 TEL: (800)564-4650 / (630)516-1222 FAX: (630)516-1820
 WWW.MICRONTRANSFORMER.COM

DATE: 1/15/08
 RELEASE DATE: _____
 DRAWN: J.G.V. CHECKED: _____ APPROVED: _____

OUTLINE DRAWING
 B500-0424-8F
 SIZE: A SCALE: NONE