


Accessories

Mounting Methods, Timer Adjustments and Dials


Front Panel Mount Kit

P/N: **BZ1**

Provides an easy method of through-the-panel mounting of 8 or 11 pin plug-in timers, flashers, and other controls. May be mounted in panels up to 0.125 in. (3.2 mm) thick. Includes two clamps and two screws.




Inches (Millimeters)
Illustrates panel opening size required to mount BZ1.





DIN Rail Mount Adaptor

P/N: **P1023-20**


Allows any 2 x 2 in. (50.8 x 50.8 mm) or 2 x 3 in. (50.8 x 76.2 mm) module to be mounted on a 35 mm DIN type rail. Comes complete with mounting hardware for 0.75 in. (19 mm) and 1 in. (25.4 mm) thick modules.



Mounting hole for #8 (M4 X 0.7) bolt
Inches (Millimeters)



P/N: **P1004-95-X**



P/N: **P1004-95**

Complete Product Details:
<http://www.ssac.com/pp1.htm>



Versa-Pot


Panel mountable, industrial potentiometer recommended for remote time delay adjustment. The shaft is slotted for screwdriver adjustment and serrated for slip-proof finger adjustment. Accepts Versa-Knob or Lock Shaft. May be ordered with two 8 in. (20.3 cm) wires soldered to pot (clockwise increase) and female quick connect terminals on other ends by adding suffix -X to end of part number.

Ordering Table

Part Number	Value (Ohms)	With Wire Leads
P1004-95	100 K	No
P1004-95-X		Yes

Technical Data

Rating	0.25W at 55°C
Taper	Linear
Shaft Rotation	300° +/-5°
Tolerance	+/-10%




Inches (Millimeters)

Versa-Knob

P/N: **P0700-7**

Versa-Knob is designed for 0.25 in (6.35 mm) shaft of Versa-Pot or Q-Pot. Semi-Gloss industrial black finish.

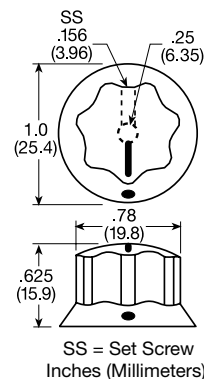

SS = Set Screw
Inches (Millimeters)

Time Adjustment Dials

Dials for use with remote Versa-Pot. Reverse screen printed on clear plastic to avoid damage to printed image.

Ordering Table

Part Number	Range	Increments
P0400-82	0.1 ... 10s	1s
P0400-26	0.1 ... 10m	1m
P0400-27	0 ... 10	Reference Dial



Time Delay Relay