








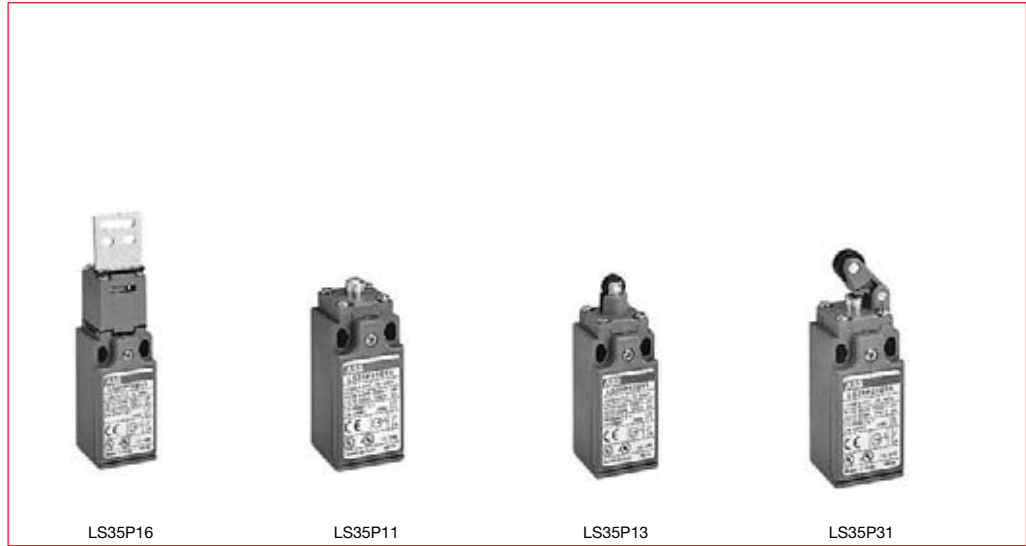

Selection guide

30mm & 40mm, IP65, UL Type 4

30mm width — LS35P







9

CENELEC conformity	—	EN 50 047	EN 50 047	EN 50 047
Actuating device and actuation type	Key translation movement 	Plain plunger 	Roller plunger 	Roller lever 
Positive contact opening				

40mm width — LS45P



CENELEC conformity	EN 50 041	EN 50 041	—	EN 50 041
Actuating device and actuation type	Plain plunger 	Roller plunger 	Roller lever 	Roller lever 
Positive contact opening	