


Assembled 40mm, IP66, UL Type 4X

Metal
Limit switches

Movement to be detected

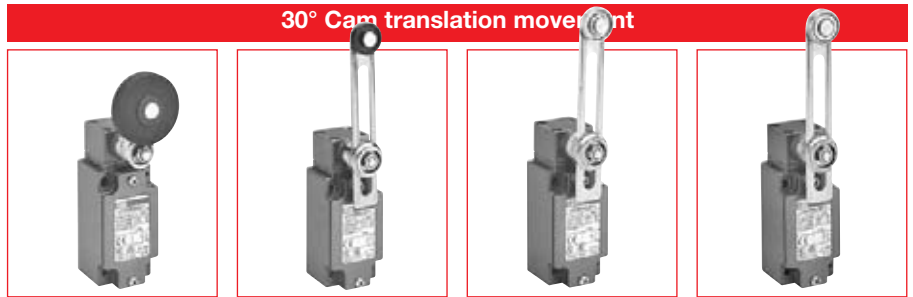

Operating head type

	ø 45 Rubber roller lever	Adjustable ø 22 polyamide roller lever	Adjustable ø 22 stainless steel roller lever	Adjustable ø 22 stainless steel ball-bearing roller lever
Conformity / (N.C. contact with positive opening operation)				
Maximum actuation speed	m/s 1.5	1.5	1.5	1.5
Min. torque: - actuation	N.m 0.15	0.15	0.15	0.15
- positive opening operation	N.m -	-	-	-

		LS45M44B11 \$ 51	LS45M51B11 \$ 51	LS45M52B11 \$ 59	LS45M53B11 \$ 55
Snap action contacts	Catalog number	LS45M44B11	LS45M51B11	LS45M52B11	LS45M53B11
	List price	\$ 51	\$ 51	\$ 59	\$ 55
	Operation diagram				
Non-overlapping slow action contacts	Catalog number	LS45M44D11	LS45M51D11	LS45M52D11	LS45M53D11
	List price	55	55	63	59
	Operation diagram				
Overlapping slow action contacts	Catalog number	LS45M44C11	LS45M51C11	LS45M52C11	LS45M53C11
	List price	57	57	65	61
	Operation diagram				
Slow action contacts	Catalog number	LS45M44L02	LS45M51L02	LS45M52L02	LS45M53L02
	List price	57	57	65	61
	Operation diagram				
Slow action contacts	Catalog number	LS45M44L20	LS45M51L20	LS45M52L20	LS45M53L20
	List price	57	57	65	61
	Operation diagram				
Snap action contacts	Catalog number	LS45M44B02	LS45M51B02	LS45M52B02	LS45M53B02
	List price	57	57	65	61
	Operation diagram				
Weight (packing per unit)	kg	0.310	0.290	0.300	0.300

Dimensions (mm)

