Assembled
60mm, IP66, UL Type 4X

Movement to be detected

On end

Operating head type

		Stainless steel plain plunger	Stainless steel ball plunger	Stainless steel lateral plain plunger
Conformity / ⊖ (N.C. contact with positive opening operation)				
Maximum actuation speed	m/s	0.5	0.5	0.5
Min. force: - actuation	N	22	22	30
- positive opening operation	N	66	66	70

Snap action contacts 13 21 Zb 14 22	Catalog number List price Operation diagram	LS65M11B11 **$ 40**	LS65M12B11 **$ 42**	LS65M21B11 **$ 42**
Non-overlapping Slow action contacts 13 21 Zb 14 22	Catalog number List price Operation diagram	LS65M11D11 **43**	LS65M12D11 **45**	LS65M21D11 **45**
Overlapping Slow action contacts 13 21 Zb 14 22	Catalog number List price Operation diagram	LS65M11C11 **44**	LS65M12C11 **47**	LS65M21C11 **47**
Slow action contacts 11 21 Zb 12 22	Catalog number List price Operation diagram	LS65M11L02 **44**	LS65M12L02 **47**	LS65M21L02 **47**
Slow action contacts 13 23 Zb 14 24	Catalog number List price Operation diagram	LS65M11L20 **44**	LS65M12L20 **47**	LS65M21L20 **47**
Snap action contacts 11 21 Zb 12 22	Catalog number List price Operation diagram	LS65M11B02 **44**	LS65M12B02 **47**	LS65M21B02 **47**
Weight (packing per unit)	kg	0.265	0.265	0.280
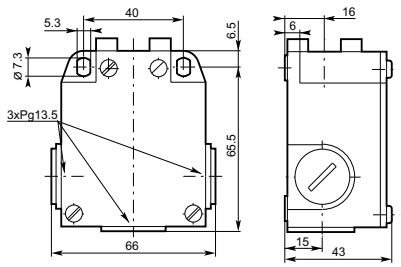
Dimensions (mm)