


Assembled 30mm, IP 65, UL Type 4

Movement to be detected

30° Cam translation movement

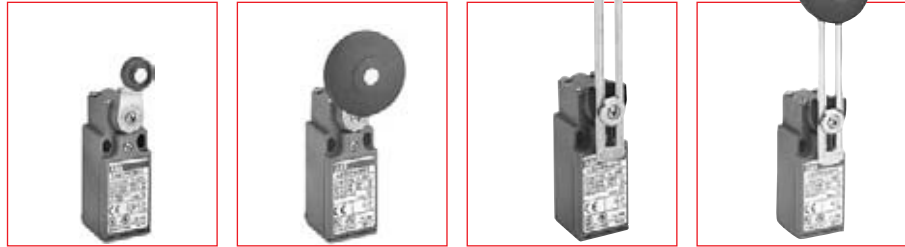

Operating head type

	Ø 18 Polyamide roller lever	Ø 45 Rubber roller lever	Adjustable Ø 18 polyamide roller lever	Adjustable Ø 45 rubber roller lever
Conformity / (N.C. contact with positive opening operation)	EN 50 047			
Maximum actuation speed	m/s 1.5	1.5	1.5	1.5
Min. torque: - actuation	N.m 0.10	0.10	0.10	0.10
- positive opening operation	N.m 0.32	—	—	—

9 Additional technical data

Snap action contacts 	Catalog number List price Operation diagram	LS35P41B11 \$ 26 0 9° 23° 55° 77° 	LS35P42B11 \$ 27 0 9° 23° 77° 	LS35P51B11 \$ 27 0 9° 23° 77° 	LS35P52B11 \$ 28 0 9 23 77
Non-overlapping slow action contacts 	Catalog number List price Operation diagram	LS35P41D11 27 0 18° 34° 77° 32° 	LS35P42D11 29 0 18° 77° 32° 	LS35P51D11 28 0 18° 77° 32° 	LS35P52D11 30 0 18 77 32
Overlapping slow action contacts 	Catalog number List price Operation diagram	LS35P41C11 28 0 30° 49° 77° 18° 	LS35P42C11 30 0 30° 77° 18° 	LS35P51C11 29 0 30° 77° 18° 	LS35P52C11 30 0 30 77 18
Slow action contacts 	Catalog number List price Operation diagram	LS35P41L02 28 0 15° 31° 77° 	LS35P42L02 30 0 15° 77° 	LS35P51L02 29 0 15° 77° 	LS35P52L02 30 0 15 77
Slow action contacts 	Catalog number List price Operation diagram	LS35P41L20 28 0 15° 77° 	LS35P42L20 30 0 15° 77° 	LS35P51L20 29 0 15° 77° 	LS35P52L20 30 0 1.3 6.5 mm
Snap action contacts 	Catalog number List price Operation diagram	LS35P41B02 28 0 9° 23° 55° 77° 	LS35P42B02 30 0 9° 23° 77° 	LS35P51B02 29 0 9° 23° 77° 	LS35P52B02 30 0 9° 23° 77°
Weight (packing per unit)	kg	0.090	0.120	0.100	0.130

Dimensions (mm)

