# Assembled
## 30mm, IP 65, UL Type 4

### Movement to be detected

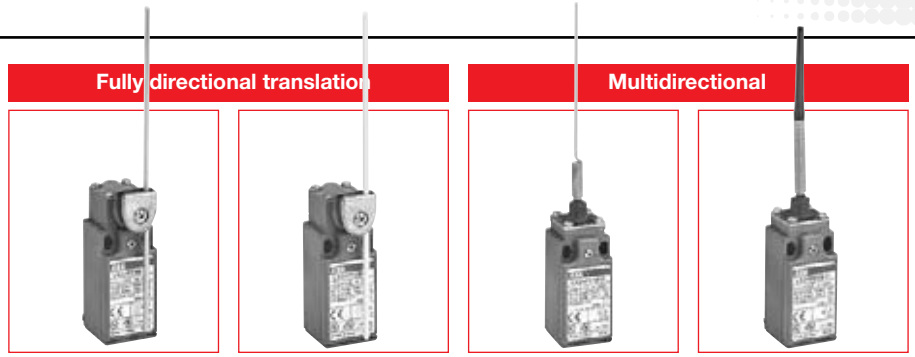


### Operating head type

| | | Adjustable ø 3 stainless steel rod lever | Adjustable ø 3 fiber-glass rod lever | Spring rod | Flexible rod with insulated end |
|---|---|---|---|---|---|
| Conformity / ⇻ (N.C. contact with positive opening operation) | | | | | |
| Maximum actuation speed | m/s | 1.5 | 1.5 | 1 | 1 |
| Min. torque: - actuation | N.m | 0.10 | 0.10 | 0.12 | 0.12 |
| - positive opening operation | N.m | — | — | — | — |

9

| | | | | | |
|---|---|---|---|---|---|
| Snap action contacts | Catalog number | LS35P71B11 | LS35P72B11 | LS35P91B11 | LS35P92B11 |
| | List price | **$ 27** | **$ 27** | **$ 25** | **$ 25** |
| 13 21 Zb 14 22 | Operation diagram | 0 9° 23° 77° / 21-22 13-14 / 21-22 13-14 | 0 9° 23° 77° / 21-22 13-14 / 21-22 13-14 | 0 6° 16° 52° / 21-22 13-14 / 21-22 13-14 | 0 6° 16° 52° / 21-22 13-14 / 21-22 13-14 |
| Non-overlapping Slow action contacts | Catalog number | LS35P71D11 | LS35P72D11 | LS35P91D11 | LS35P92D11 |
| | List price | **28** | **28** | **27** | **27** |
| 13 21 Zb 14 22 | Operation diagram | 0 18° 77° / 21-22 13-14 / 32° | 0 18° 77° / 21-22 13-14 / 32° | 0 12° 50° / 21-22 13-14 / 21° | 0 12° 50° / 21-22 13-14 / 21° |
| Overlapping Slow action contacts | Catalog number | LS35P71C11 | LS35P72C11 | LS35P91C11 | LS35P92C11 |
| | List price | **29** | **29** | **27** | **27** |
| 13 21 Zb 14 22 | Operation diagram | 0 30° 77° / 21-22 13-14 / 18° | 0 30° 77° / 21-22 13-14 / 18° | 0 19 50 / 21-22 13-14 / 12 | 0 19° 50° / 21-22 13-14 / 12° |
| Slow action contacts | Catalog number | LS35P71L02 | LS35P72L02 | LS35P91L02 | LS35P92L02 |
| | List price | **29** | **29** | **27** | **27** |
| 11 21 Zb 12 22 | Operation diagram | 0 15° 77° / 11-12 21-22 | 0 15° 77° / 11-12 21-22 | 0 10° 50° / 11-12 21-22 | 0 10° 50° / 11-12 21-22 |
| Slow action contacts | Catalog number | LS35P71L20 | LS35P72L20 | LS35P91L20 | LS35P92L20 |
| | List price | **29** | **29** | **27** | **27** |
| 13 23 Zb 14 24 | Operation diagram | 0 15° 77° / 13-14 23-24 | 0 15° 77° / 13-14 23-24 | 0 10° 50° / 13-14 23-24 | 0 10° 50° / 13-14 23-24 |
| Snap action contacts | Catalog number | LS35P71B02 | LS35P72B02 | LS35P91B02 | LS35P92B02 |
| | List price | **29** | **29** | **27** | **27** |
| 11 21 Zb 12 22 | Operation diagram | 0 9° 23° 77° / 11-12 21-22 / 11-12 21-22 | 0 9° 23° 77° / 11-12 21-22 / 11-12 21-22 | 0 6° 16° 52° / 11-12 21-22 / 11-12 21-22 | 0 6° 16° 52° / 11-12 21-22 / 11-12 21-22 |
| Weight (packing per unit) | kg | 0.100 | 0.100 | 0.080 | 0.080 |
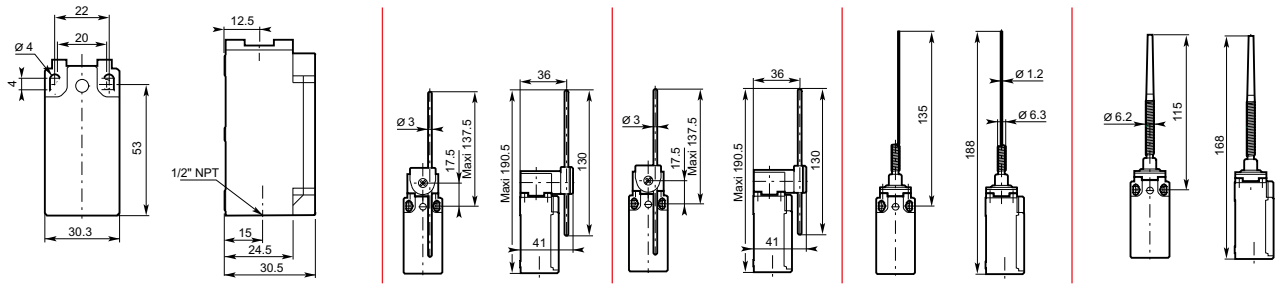
### Dimensions (mm)