




# 16A – 100A, Base & DIN rail mounted Accessories




OTZW8

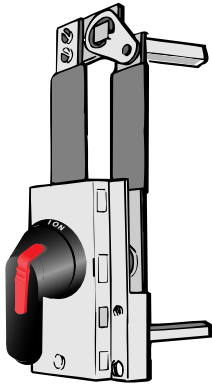

OTZW6

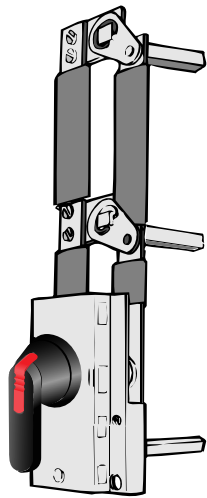

OTZW17

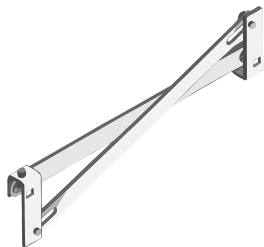

OETL-ZW24

### Conversion mechanisms

- For use with Base and DIN rail mounted switches only
- Switches are not included


Description	For use on:	Weight (lbs.)	UL/NEMA type	Catalog number	List price
6 or 8 pole	OT16 – OT100	0.33	—	OTZW8	\$ 60
Transfer	OT16 – OT100	1.87	1,3R,12	OTZW6	240
Transfer	OT16 – OT100	1.87	1,3R, 4, 4X,12	OTZW6X	280
Bypass	OT16 – OT100	1.54	1,3R,12	OTZW17	340
Bypass	OT16 – OT100	1.54	1,3R, 4, 4X,12	OTZW17X	380
Mechanical interlock	OT16 – OT100	0.33	—	OETL-ZW24	80

### 6 or 8 pole — OTZW8

6 (8) pole mechanism allows two switches controlled by one handle to open or close simultaneously.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.10)
- One handle<sup>①</sup> (see page 18.10 – 18.11)
- One shaft (see page 18.10 – 18.11)

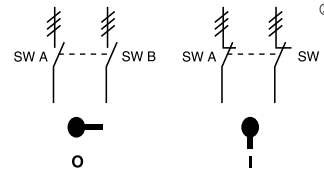

	POS. O	POS. I
SW. A	O	X
SW. B	O	X


X = Closed  
O = Open

### Transfer — OTZW6, OTZW6X

Transfer mechanism manually transfers between two power sources using two switches and a center OFF position.

A 3-position handle is included: OHB80J6E011 (UL Type 1, 3R & 12) or OHB80L6E011 (UL Type 1, 3R, 4, 4X, 12) Shafts included. Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.10.)

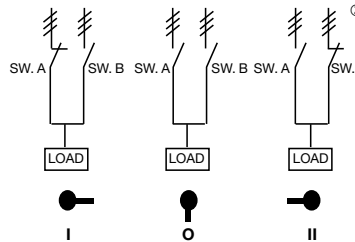

	POS. I	POS. O	POS. II
SW. A	X	O	O
SW. B	O	O	X


X = Closed  
O = Open

### Bypass — OTZW17, OTZW17X

Bypass mechanism operates three switches: Two switches in series and one changeover switch to allow power bypass.

A 3-position handle is included: OHB80J6E011 (UL Type 1, 3R & 12) or OHB80L6E011 (UL Type 1, 3R, 4, 4X, 12) Shafts included. Equipment required for a complete installation:

- One conversion mechanism
- Three disconnect switches (see page 18.10.)

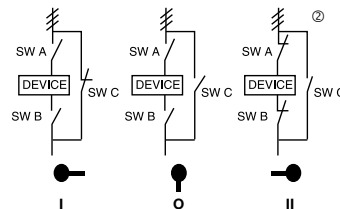

	POS. I	POS. O	POS. II
SW. A	O	O	X
SW. B	O	O	X
SW. C	X	O	O


X = Closed  
O = Open

### Mechanical interlock — OETL-ZW24

Mechanical interlock mechanism prevents both switches from being in the ON position at the same time.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.10)
- Two handles (see page 18.10 – 18.11)
- Two shafts (see page 18.10 – 18.11)



	SW. A POS. I	SW. B POS. I
SW. A	X	O
SW. B	O	X

X = Closed  
O = Open

**Drawing and mounting information found on pg 18.65**

① OT16E3 – OT32E3 can use a selector or pistol handle. All other sizes must use a pistol handle.

② ≡ = Three poles