



400A – 800A Accessories


Disconnect
switches
Non-fusible

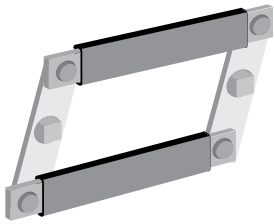


OETL-ZW9

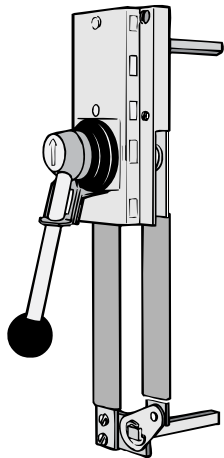

OETL-ZW12

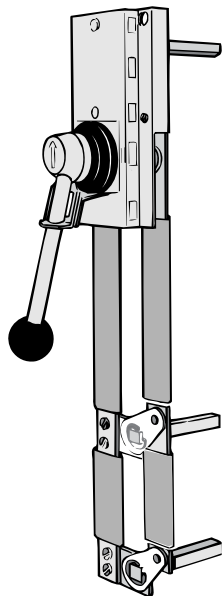

OETL-ZW13

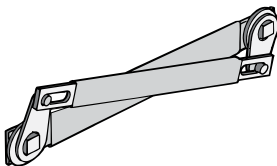

OETL-ZW3, -ZW14, -ZW15

Conversion mechanisms

• Switches are not included


Description	For use on:	Weight (lbs)	UL/NEMA type	Catalog number	List price
6 or 8 pole Transfer Bypass	OT400 – 600	2.42	—	OETL-ZW9	\$ 260
		10.1	1,3R,4,4X,12	OETL-ZW12	560
		8.81	1,3R,4,4X,12	OETL-ZW13	560
Mechanical interlock	OETL-NF800A	1.26	—	OETL-ZW3	140
		1.15	—	OETL-ZW14	140
		2.64	—	OETL-ZW15	160

6 or 8 pole — OETL-ZW9

6 (8) pole mechanism allows two switches controlled by one handle to open or close simultaneously.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.26)
- One handle (see page 18.26)
- Two shafts (see page 18.26)

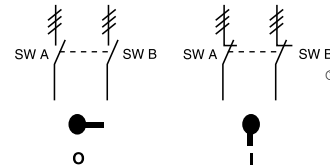

	POS.O	POS.I
SW. A	O	X
SW. B	O	X


X = Closed
O = Open

Transfer — OETL-ZW12

Transfer mechanism manually transfers between two power sources using two switches and a center OFF position. A 3 position handle is included. YASDA-21 (UL Type 1, 3R, 4, 4X, 12). Shafts included.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.26)

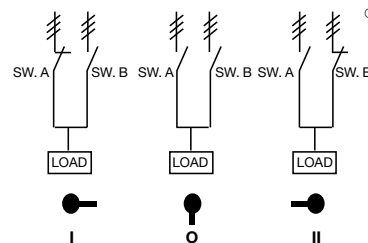


	POS. I	POS.O	POS.II
SW. A	X	O	O
SW. B	O	O	X

X = Closed
O = Open

Bypass — OETL-ZW13

Bypass mechanism operates three switches: Two switches in series and one changeover switch to allow power bypass. A 3 position handle is included. YASDA-6 (UL Type 1, 3R, 4, 4X, 12). Shafts included.

- Equipment required for a complete installation:
- One conversion mechanism
 - Three disconnect switches (see page 18.26)

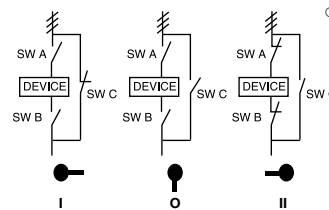

	POS. I	POS.O	POS.II
SW. A	O	O	X
SW. B	O	O	X
SW. C	X	O	O


X = Closed
O = Open

Mechanical interlock — OETL-ZW3, OETL-ZW14, OETL-ZW15

Mechanical interlock mechanism prevents both switches from being in the ON position at the same time.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.26)
- Two shafts (see page 18.26)
- Two handles (see page 18.26)



	SW. A POS. I	SW. B POS. I
SW. A	X	O
SW. B	O	X

X = Closed
O = Open

Drawing and mounting information found on pg 18.67 & 18.68

① ≡ = Three poles