

Technical data


Other configuration descriptions

Disconnect
switches
Fusible
Enclosed

Conversion mechanisms

6 or 8 pole

6 (8) pole mechanism allows two switches controlled by one handle to open or close simultaneously.




	POS. O	POS. I
SW. A	O	X
SW. B	O	X

X = Closed
O = Open

Transfer^①

Transfer mechanism manually transfers between two power sources using two switches and a center "OFF" position.

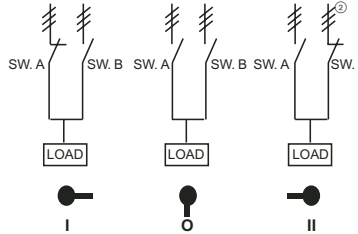


	POS. I	POS.O	POS.II
SW. A	X	O	O
SW. B	O	O	X

X = Closed
O = Open

Bypass^①

Bypass mechanism operates three switches: Two switches in series and one changeover switch to allow power bypass.

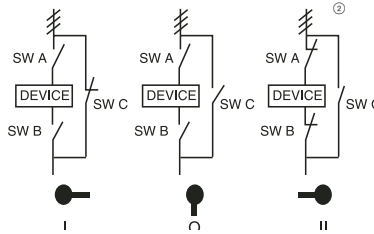


	POS. I	POS.O	POS.II
SW. A	O	O	X
SW. B	O	O	X
SW. C	X	O	O

X = Closed
O = Open

Mechanical interlock

Mechanical interlock mechanism prevents both switches from being in the ON position at the same time.



	SW. A POS. I	SW. B POS. O
SW. A	X	O
SW. B	O	X

X = Closed
O = Open

^① Transfer and bypass enclosed switches include the load side bussed or cabled together, and all switches come standard with ground lugs.

^② ≡ = Three poles