




1200A – 3150A Accessories

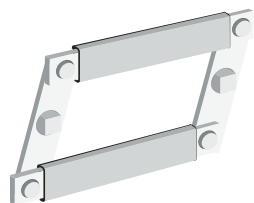


OETL-ZW9

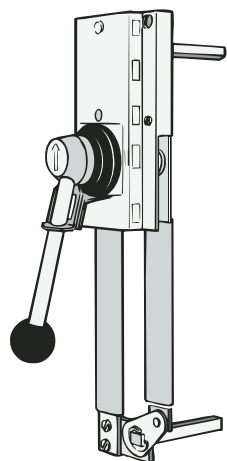

OETL-ZW12

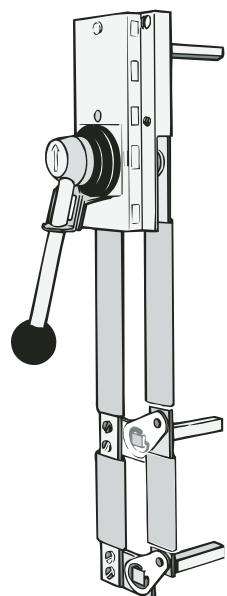

OETL-ZW13

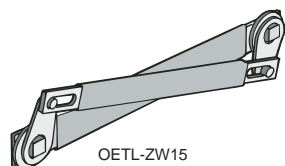

OETL-ZW15

Conversion mechanisms

- Switches are not included


Description	For use on:	Weight (lbs)	UL/NEMA type	Catalog number	List price
6 or 8 pole Transfer Bypass	OETL-NF1200	2.42	—	OETL-ZW9	\$ 260
		10.1	1,3R,4,4X,12	OETL-ZW12	560
		8.81	1,3R,4,4X,12	OETL-ZW13	560
Mechanical interlock	OETL-NF1200 – OETL-NF3150	2.64	—	OETL-ZW15	160

6 or 8 pole — OETL-ZW9

6 (8) pole mechanism allows two switches controlled by one handle to open or close simultaneously.

Equipment required for a complete installation:

- One conversion mechanism.
- Two disconnect switches (see page 17.31)
- One handle (see page 17.31)
- Two shafts (see page 17.31)

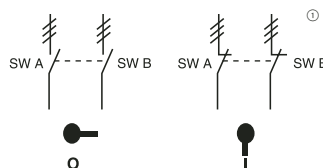


	POS. O	POS. I
SW. A	O	X
SW. B	O	X

X = Closed
O = Open

Transfer — OETL-ZW12

Transfer mechanism manually transfers between two power sources using two switches and a center OFF position. A 3 position handle is included. YASDA-21 (Type 1, 3R, 4, 4X, 12). Shafts included. Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 17.31)

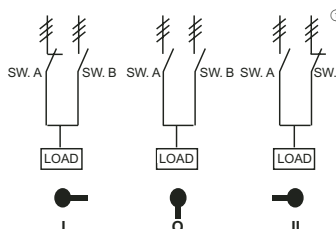


	POS. I	POS. O	POS. II
SW. A	X	O	O
SW. B	O	O	X

X = Closed
O = Open

Bypass — OETL-ZW13

Bypass mechanism operates three switches: Two switches in series and one changeover switch to allow power bypass. A 3 position handle is included. YASDA-6 (Type 1, 3R, 4, 4X, 12). Shafts included. Equipment required for a complete installation:

- One conversion mechanism
- Three disconnect switches (see page 17.31)

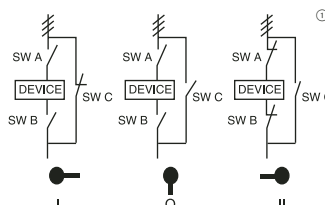

	POS. I	POS. O	POS. II
SW. A	O	O	X
SW. B	O	O	X
SW. C	X	O	O

X = Closed
O = Open

Mechanical interlock — OETL-ZW15

Mechanical interlock mechanism prevents both switches from being in the "ON" position at the same time. Handles are not included.

- Equipment required for a complete installation:
- One conversion mechanism
 - Two disconnect switches (see page 17.31)
 - Two shafts (see page 17.31)
 - Two handles (see page 17.31)



	SW. A POS. I	SW. B POS. I
SW. A	X	O
SW. B	O	X

X = Closed
O = Open

Drawing and mounting information found on pg 17.68 & 17.71

① ≡ Three poles