


## Inductive 2 Wire AC Sensing range: 2mm

Operating distance		2mm	2mm
Catalog number		SIF2M12NV2AO	SIF2M12NC2AO
List price		<b>\$ 101.00</b>	<b>\$ 103.00</b>
Sensor mounting		Shielded	Shielded
Output			
Suffix AO		Normally Open	Normally Open
Suffix AC		Normally Closed	Normally Closed
Operating voltage	VAC	20 – 250	20 – 250
Load current	mA	200	200
Switching frequency	Hz	25	25
No load supply current	mA	0.8	0.8
Voltage drop	VAC	5	5
Short circuit protection		no	no
Reverse polarity protection		N/A	N/A
Output indication		LED yellow	LED yellow
Operating temperature	°F	-13 ... +158	-13 ... +158
Protection IEC		IP67	IP67
Approvals			
CE		yes	yes
UL Listed		yes	yes
CSA		yes	yes
Wire size		22 AWG/0.34mm <sup>2</sup>	—
Housing material		Nickel plated brass	Nickel plated brass
Housing diameter	mm	12	12
Sensing face		Crastin	Crastin
Connection		2 m, PVC cable	Connector 1/2" – 20




10


### Approximate dimensions



### Approximate dimensions



### Wiring diagrams

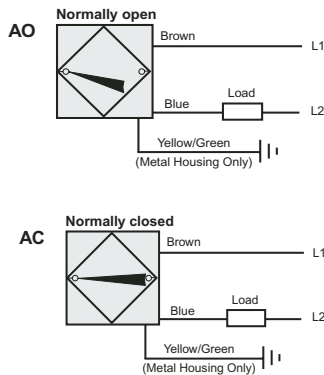

### Wiring diagrams

