



# 400A – 800A Accessories


Disconnect  
switches  
Non-fusible

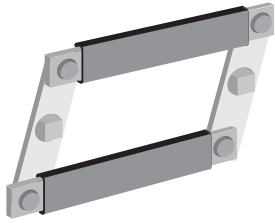


OETL-ZW9

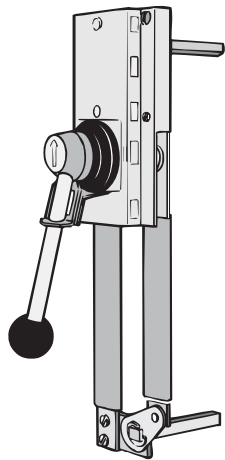

OETL-ZW12

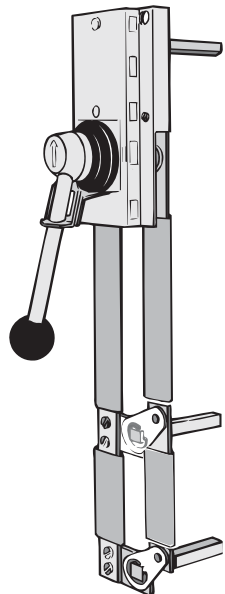

OETL-ZW13

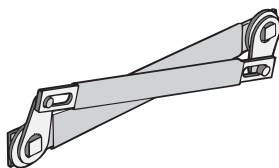

OETL-ZW3, -ZW14, -ZW15

## Conversion mechanisms

• Switches are not included


| Description                       | For use on:                             | Weight (lbs) | UL/NEMA type | Catalog number | List price |
|-----------------------------------|---|--------------|--------------|----------------|------------|
| 6 or 8 pole<br>Transfer<br>Bypass | OT400, &<br>OETL-NF600 –<br>OETL-NF800A | 2.42         | —            | OETL-ZW9       | \$ 260     |
|                                   |   | 10.1         | 1,3R,4,4X,12 | OETL-ZW12      | 560        |
|                                   |   | 8.81         | 1,3R,4,4X,12 | OETL-ZW13      | 560        |
| Mechanical interlock              |   | 1.26         | —            | OETL-ZW3       | 140        |
|                                   |   | 1.15         | —            | OETL-ZW14      | 140        |
|                                   |   | 2.64         | —            | OETL-ZW15      | 160        |

### 6 or 8 pole — OETL-ZW9

6 (8) pole mechanism allows two switches controlled by one handle to open or close simultaneously.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.26)
- One handle (see page 18.26)
- Two shafts (see page 18.26)

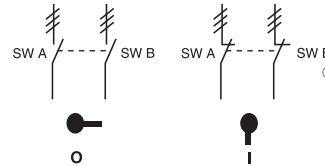

|       | POS.O | POS.I |
|-------|-------|-------|
| SW. A | O     | X     |
| SW. B | O     | X     |


X = Closed  
O = Open

### Transfer — OETL-ZW12

Transfer mechanism manually transfers between two power sources using two switches and a center OFF position. A 3 position handle is included. YASDA-21 (UL Type 1, 3R, 4, 4X, 12). Shafts included.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.26)

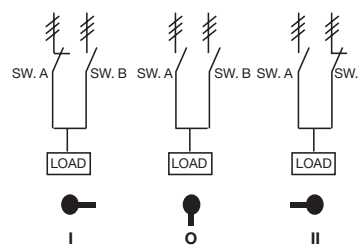


|       | POS. I | POS.O | POS.II |
|-------|--------|-------|--------|
| SW. A | X      | O     | O      |
| SW. B | O      | O     | X      |

X = Closed  
O = Open

### Bypass — OETL-ZW13

Bypass mechanism operates three switches: Two switches in series and one changeover switch to allow power bypass. A 3 position handle is included. YASDA-6 (UL Type 1, 3R, 4, 4X, 12). Shafts included.

- Equipment required for a complete installation:
- One conversion mechanism
  - Three disconnect switches (see page 18.26)

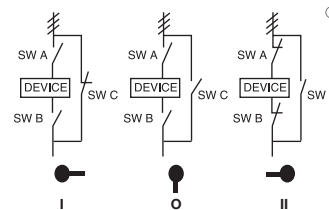

|       | POS. I | POS.O | POS.II |
|-------|--------|-------|--------|
| SW. A | O      | O     | X      |
| SW. B | O      | O     | X      |
| SW. C | X      | O     | O      |


X = Closed  
O = Open

### Mechanical interlock — OETL-ZW3, OETL-ZW14, OETL-ZW15

Mechanical interlock mechanism prevents both switches from being in the ON position at the same time.

Equipment required for a complete installation:

- One conversion mechanism
- Two disconnect switches (see page 18.26)
- Two shafts (see page 18.26)
- Two handles (see page 18.26)



|       | SW. A<br>POS. I | SW. B<br>POS. I |
|-------|-----------------|-----------------|
| SW. A | X               | O               |
| SW. B | O               | X               |

X = Closed  
O = Open

Drawing and mounting information found on pg 18.71 & 18.72

① ≡ = Three poles