


Inductive 4 Wire DC Sensing range: 20mm

Operating distance	20mm	
Catalog number	SIF20Q40TC1PK	
List price	\$ 114.00	
Sensor mounting	Shielded	
Output	PNP N.O. + N.C.	
Suffix PK		
Suffix NK		
Operating voltage	VDC	10 – 30
Load current	mA	200
Switching frequency	Hz	150
No load supply current	mA	20
Voltage drop	VDC	2
Short circuit protection	yes	
Reverse polarity protection	yes	
Output indication	LED yellow	
Operating temperature	°F	-13 ... +158
Protection	IEC IP67	
Approvals		
CE	yes	
UL Listed	yes	
CSA	yes	
Wire size	—	
Housing material	Crastin/Crastin base	
Housing diameter	mm	—
Sensing face	Crastin	
Connection	Connector M12	



10

Approximate dimensions

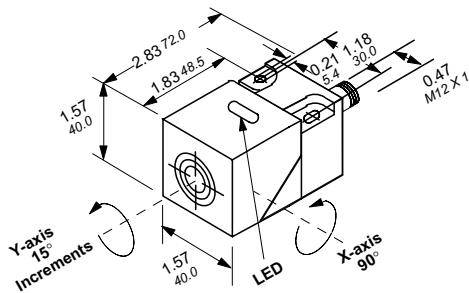

Wiring diagrams

