Special Cam Switches, Contact plan

Type _____

Project number _____

Company_____

Customer's number _____

Phone/Fax nr._____

Quantity _____ **pcs**

Handled by: _____

Name_____

Date _____

Interconnection between contacts Contact closed

X

Contact closed between positions

Early make/Late break (at least 60° between steps)

Automatic spring return (step max 60°)

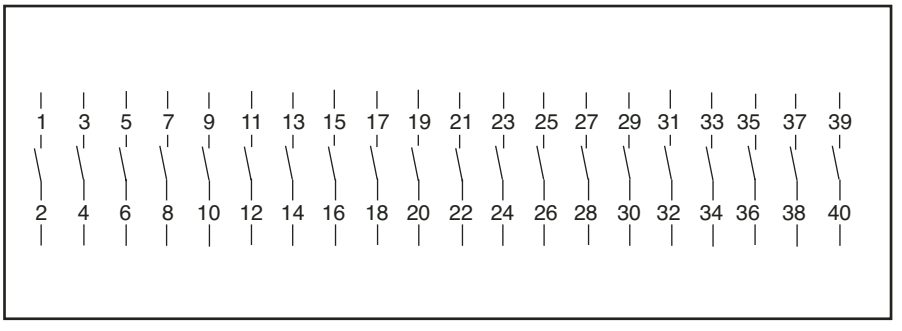

ON_M OM ON

	1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39
	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40

11

Door mounting

OM, Miniature ☐
ON, Normal ☐

Handle:
Black B ☐
Grey G ☐
Key operated ☐

Additional lettering plate

Front plate

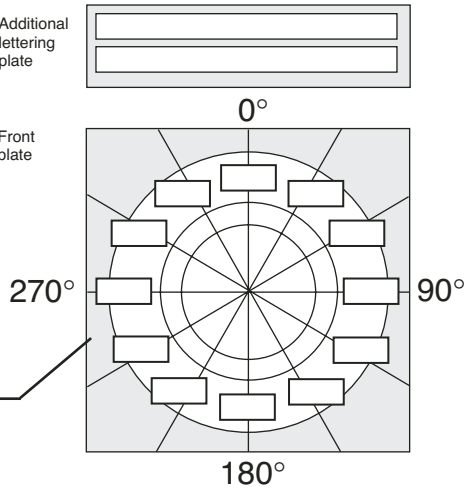

Max 6 (7) Letters

Max 20 contacts (ON),16 contacts (OM)
[Max 6 (7) Letters]

DIN-rail mounting

ON_M, Modular ☐

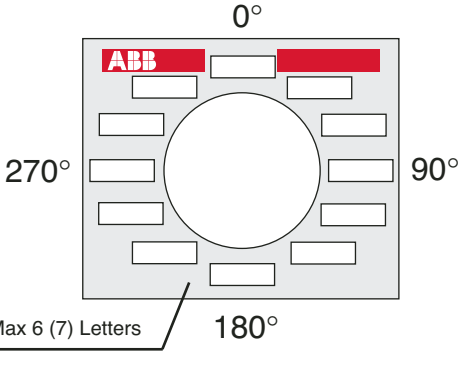

Max 3 chambers = 6 contacts
[Max 6 (7) Letters]

ABB Inc.