

S280 (W) 480Y/277 VAC Supplemental Protectors

S280
KW


K UL 1077 CSA C22.2 - NO. 235
VDE 0660
Cable & equipment protection



S281-KW, 1 pole



S282-KW, 2 pole



S283-KW, 3 pole


Rated current	Catalog number	List price	Delivery class	Sugg. order qty	Wgt. oz. (1 pc.)
1 pole					
0.2	S281-K0.2W	\$ 54			
0.3	S281-K0.3W	54			
0.5	S281-K0.5W	54			
0.75	S281-K0.75W	54			
1	S281-K1W	54			
1.6	S281-K1.6W	54			
2	S281-K2W	54			
3	S281-K3W	54			
4	S281-K4W	54			
6	S281-K6W	54			
8	S281-K8W	54	B	10	4.6
10	S281-K10W	54			
13	S281-K13W	54			
16	S281-K16W	54			
20	S281-K20W	54			
25	S281-K25W	56			
32	S281-K32W	58			
40	S281-K40W	64			
50	S281-K50W	70			
63	S281-K63W	80			

Rated current	Catalog number	List price	Delivery class	Sugg. order qty	Wgt. oz. (1 pc.)
3 pole					
0.2	S283-K0.2W	\$ 194			
0.3	S283-K0.3W	194			
0.5	S283-K0.5W	194			
0.75	S283-K0.75W	194			
1	S283-K1W	194			
1.6	S283-K1.6W	194			
2	S283-K2W	194			
3	S283-K3W	194			
4	S283-K4W	194			
6	S283-K6W	194	B	3	13.9
8	S283-K8W	194			
10	S283-K10W	194			
13	S283-K13W	194			
16	S283-K16W	194			
20	S283-K20W	194			
25	S283-K25W	196			
32	S283-K32W	200			
40	S283-K40W	214			
50	S283-K50W	246			
63	S283-K63W	280			

Rated current	Catalog number	List price	Delivery class	Sugg. order qty	Wgt. oz. (1 pc.)
2 pole					
0.2	S282-K0.2W	128			
0.3	S282-K0.3W	128			
0.5	S282-K0.5W	128			
0.75	S282-K0.75W	128			
1	S282-K1W	128			
1.6	S282-K1.6W	128			
2	S282-K2W	128			
3	S282-K3W	128			
4	S282-K4W	128			
6	S282-K6W	128	B	5	9.2
8	S282-K8W	128			
10	S282-K10W	128			
13	S282-K13W	128			
16	S282-K16W	128			
20	S282-K20W	128			
25	S282-K25W	130			
32	S282-K32W	134			
40	S282-K40W	134			
50	S282-K50W	162			
63	S282-K63W	182			

Delivery Class
A - Standard item, stock to 2 weeks lead time
B - Stock to 4 weeks lead time
C - 6 to 8 week lead time

K

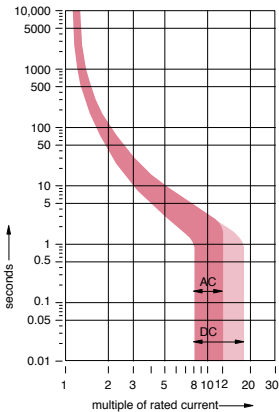

For use with ring tongue terminal connectors