


S200UP

480Y/277 VAC


Miniature MCCBs




Z UL 489 CSA C22.2 - NO. 5
VDE 0660
Cable & equipment protection




S201UP-Z, 1 pole



S202UP-Z, 2 pole




S203UP-Z, 3 pole



S204UP-Z, 4 pole

Z

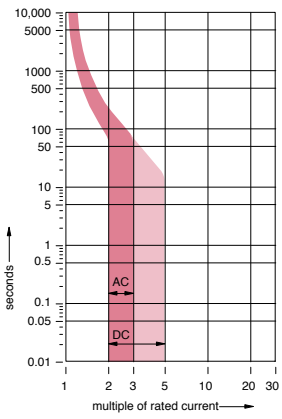

The graph shows the time-current characteristic for the S200UP MCCBs. The vertical axis represents time in seconds on a logarithmic scale from 0.01 to 10,000. The horizontal axis represents the multiple of rated current on a logarithmic scale from 1 to 30. A shaded region indicates the operating range, with a vertical line at approximately 2.5 times rated current. Two horizontal arrows indicate the trip times for AC and DC circuits, both occurring at approximately 0.1 seconds.

Rated current	Catalog number	List price	Delivery class	Sugg. order qty	Wgt. oz. (1 pc.)
1 pole					
0.2	S201UP-Z0.2	\$ 115			
0.3	S201UP-Z0.3	115			
0.5	S201UP-Z0.5	115			
0.75	S201UP-Z0.75	115			
1	S201UP-Z1	115			
1.6	S201UP-Z1.6	115			
2	S201UP-Z2	115			
3	S201UP-Z3	115			
4	S201UP-Z4	115			
5	S201UP-Z5	115			
6	S201UP-Z6	115			
8	S201UP-Z8	115	A	10	4.6
10	S201UP-Z10	115			
13	S201UP-Z13	115			
15	S201UP-Z15	115			
16	S201UP-Z16	115			
20	S201UP-Z20	115			
25	S201UP-Z25	115			

Rated current	Catalog number	List price	Delivery class	Sugg. order qty	Wgt. oz. (1 pc.)
2 pole					
0.2	S202UP-Z0.2	270			
0.3	S202UP-Z0.3	270			
0.5	S202UP-Z0.5	270			
0.75	S202UP-Z0.75	270			
1	S202UP-Z1	270			
1.6	S202UP-Z1.6	270			
2	S202UP-Z2	270			
3	S202UP-Z3	270			
4	S202UP-Z4	270			
5	S202UP-Z5	270			
6	S202UP-Z6	270	A	5	9.2
8	S202UP-Z8	270			
10	S202UP-Z10	270			
13	S202UP-Z13	270			
15	S202UP-Z15	270			
16	S202UP-Z16	270			
20	S202UP-Z20	270			
25	S202UP-Z25	270			

Rated current	Catalog number	List price	Delivery class	Sugg. order qty	Wgt. oz. (1 pc.)
3 pole					
0.2	S203UP-Z0.2	\$ 400			
0.3	S203UP-Z0.3	400			
0.5	S203UP-Z0.5	400			
0.75	S203UP-Z0.75	400			
1	S203UP-Z1	400			
1.6	S203UP-Z1.6	400			
2	S203UP-Z2	400			
3	S203UP-Z3	400			
4	S203UP-Z4	400			
5	S203UP-Z5	400			
6	S203UP-Z6	400	A	1	13.9
8	S203UP-Z8	400			
10	S203UP-Z10	400			
13	S203UP-Z13	400			
15	S203UP-Z15	400			
16	S203UP-Z16	400			
20	S203UP-Z20	400			
25	S203UP-Z25	400			

Rated current	Catalog number	List price	Delivery class	Sugg. order qty	Wgt. oz. (1 pc.)
4 pole					
0.2	S204UP-Z0.2	564			
0.3	S204UP-Z0.3	564			
0.5	S204UP-Z0.5	564			
0.75	S204UP-Z0.75	564			
1	S204UP-Z1	564			
1.6	S204UP-Z1.6	564			
2	S204UP-Z2	564			
3	S204UP-Z3	564			
4	S204UP-Z4	564			
5	S204UP-Z5	564			
6	S204UP-Z6	564	B	1	18.0
8	S204UP-Z8	564			
10	S204UP-Z10	564			
13	S204UP-Z13	564			
15	S204UP-Z15	564			
16	S204UP-Z16	564			
20	S204UP-Z20	564			
25	S204UP-Z25	564			

Delivery Class

A - Standard item, stock to 2 weeks lead time
B - Stock to 4 weeks lead time
C - 6 to 8 week lead time

UL489 listed as branch
circuit protective device