

## Technical data

### Busbars & connectors

### Connection methods

Technical  
data



Dual function terminals provided in open position for connection to busbars or cable.




Terminals allow for connection of cable 18-4 AWG.




Two slots per terminal offer the ability to connect, independently, two conductors. This may be cables or bus bar.



Top and bottom terminals can be bussed together with single phase or multi-phase busbars as shown. Both line and load side terminals can be bus bar connected.

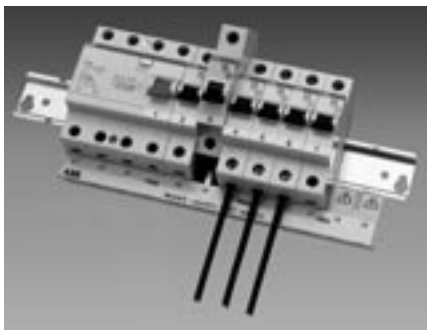

Easy removal of devices from an assembly when using bus bar in the bottom, load side terminals.

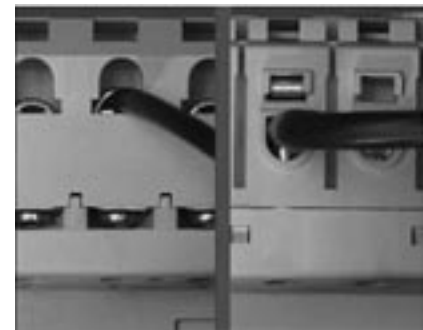

Conductors can only be inserted into open terminals, preventing mis-wiring and potential problems.