

S500


600Y/277 VAC



S501-D20




S502-D13



S503-K6

K

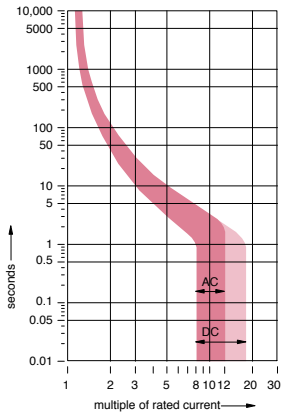

K UL 1077 CSA C22.2
VDE 0641 IEC-898

Delivery Class

- A** - Standard item, stock to 2 weeks lead time
- B** - Stock to 4 weeks lead time
- C** - 6 to 8 week lead time

Rated current	Catalog number	List price	Delivery class	Wgt. oz. (1 Pc.)
1 pole				
0.1 - 0.15	S501-K0.15	\$ 182	B	8.90
0.14 - 0.21	S501-K0.21	182		
0.2 - 0.3	S501-K0.3	182		
0.28 - 0.42	S501-K0.42	182		
0.38 - 0.58	S501-K0.58	182		
0.53 - 0.8	S501-K0.8	182		
0.73 - 1.1	S501-K1.1	182		
1 - 1.5	S501-K1.5	182		
1.4 - 2.1	S501-K2.1	182		
2 - 3	S501-K3	182		
2.8 - 4.2	S501-K4.2	182		
3.8 - 5.8	S501-K5.8	182		
5.3 - 8	S501-K8	182		
7.3 - 11	S501-K11	182		
10 - 15	S501-K15	182		
14 - 20	S501-K20	182		
18 - 26	S501-K26	182		
23 - 32	S501-K32	202		
29 - 37	S501-K37	202		
34 - 41	S501-K41	226		
38 - 45	S501-K45	226		
2 pole				
0.1 - 0.15	S502-K0.15	356	B	17.85
0.14 - 0.21	S502-K0.21	356		
0.2 - 0.3	S502-K0.3	356		
0.28 - 0.42	S502-K0.42	356		
0.38 - 0.58	S502-K0.58	356		
0.53 - 0.8	S502-K0.8	356		
0.73 - 1.1	S502-K1.1	356		
1 - 1.5	S502-K1.5	356		
1.4 - 2.1	S502-K2.1	356		
2 - 3	S502-K3	356		
2.8 - 4.2	S502-K4.2	356		
3.8 - 5.8	S502-K5.8	356		
5.3 - 8	S502-K8	356		
7.3 - 11	S502-K11	356		
10 - 15	S502-K15	356		
14 - 20	S502-K20	356		
18 - 26	S502-K26	356		
23 - 32	S502-K32	392		
29 - 37	S502-K37	392		
34 - 41	S502-K41	442		
38 - 45	S502-K45	442		
3 pole				
0.1 - 0.15	S503-K0.15	518	B	25.36
0.14 - 0.21	S503-K0.21	518		
0.2 - 0.3	S503-K0.3	518		
0.28 - 0.42	S503-K0.42	518		
0.38 - 0.58	S503-K0.58	518		
0.53 - 0.8	S503-K0.8	518		
0.73 - 1.1	S503-K1.1	518		
1 - 1.5	S503-K1.5	518		
1.4 - 2.1	S503-K2.1	518		
2 - 3	S503-K3	518		
2.8 - 4.2	S503-K4.2	518		
3.8 - 5.8	S503-K5.8	518		
5.3 - 8	S503-K8	518		
7.3 - 11	S503-K11	518		
10 - 15	S503-K15	518		
14 - 20	S503-K20	518		
18 - 26	S503-K26	518		
23 - 32	S503-K32	574		
29 - 37	S503-K37	574		
34 - 41	S503-K41	644		
38 - 45	S503-K45	828		