


Tmax Molded case circuit breakers

ABB Tmax Molded case circuit breakers

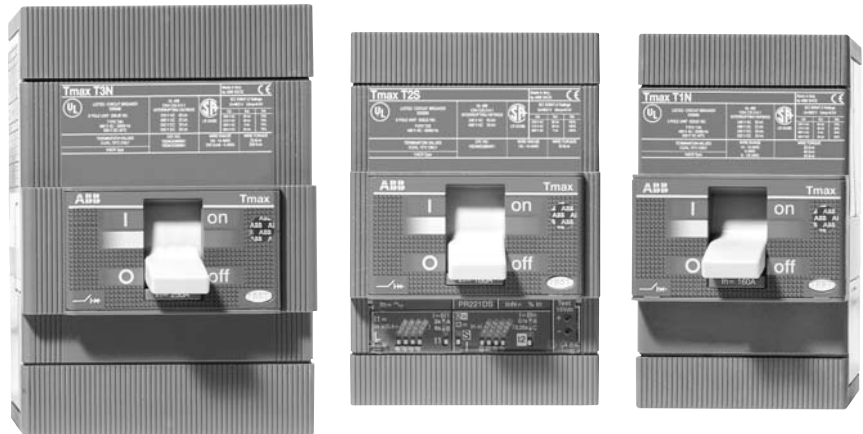

Introduction

ABB is once again demonstrating its commitment to new product development and its superiority in product performance. Never before has the industry seen such high performance, versatility and standardization in a range of molded case circuit breakers.

The ABB Tmax has been developed to complement the performance-proven Isomax line of circuit breakers. This new breaker, with a range up to 225A, has several very big features that go along with its very small size:

- Double insulation – this construction characteristic allows for the UL Listed field installation of internal accessories without exposure to the power poles.
- Positive operation – all molded case breakers from ABB ensure that the toggle indicates the precise position of the moving contacts. This guarantees safe and reliable signaling by the device.
- Installation – Tmax T1, T2 and T3 can be installed in panels and switchboards in either the horizontal or vertical planes while being fed from either end without any derating of their performance characteristics.
- Range of accessories – in the pursuit of standardization, all Tmax internal and external accessories can be utilized across the entire range from 10A to 225A.
- Interrupt ratings from 22kAIC at 480VAC up to 65kAIC.
- Standard depth – all three frames are 2.76 inches deep
- UL Listed and IEC rated for global application and acceptance.

The ABB Tmax has the performance and accessories to satisfy all industry requirements in the 480VAC to 500VDC ranges. A single pole molded case version is available for the first time. Standardized sizing and accessories make it easy to design and install these items in all applications.

Frame sizes — three basic sizes

The ABB Tmax series includes three basic frame sizes as well as the T1 single pole with the range rated from 10A to 225A at 480VAC. The various versions carry the following interrupting capacities:

- **B** basic breaking capacity
- **N** normal breaking capacity
- **S** standard breaking capacity
- **H** high breaking capacity

Derived versions

- T2 circuit breakers with LS/I electronic trip units
- Switch disconnectors in T1 and T3 frames
- Circuit breakers for motor circuit protection (MCPs)
- Circuit breakers for direct current

ABB Tmax versions

- Fixed: all models
- Plug-in: T2 & T3 UL
- UL File #E93565 (breakers and MCPs)
#E116596 (Accessories)
#E116595 (Molded case switches)

15