


Disconnect  
switches  
Non-fusible

## Overview OT16E3 – OT160E3

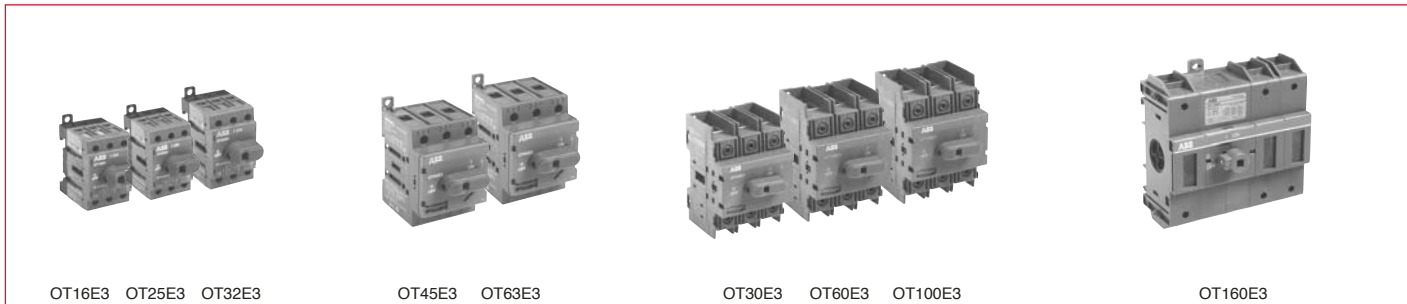

Catalog number	3 pole	OT16E3	OT25E3	OT32E3	OT45E3	OT63E3	OT30E3	OT60E3	OT100E3	OT160E3
<b>General purpose amp rating</b>	<b>A</b>	<b>16</b>	<b>25</b>	<b>40</b>	<b>60</b>	<b>80</b>	<b>30</b>	<b>60</b>	<b>100</b>	<b>125</b>
Catalog reference	Page #	17.10	17.10	17.10	17.10	17.10	17.10	17.10	17.10	17.20
Approvals <sup>①</sup>										
	2 pole	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	UL98
	3 pole	UL508	UL508	UL508	UL508	UL508	UL98	UL98	UL98	UL98
	4 pole	UL508	UL508	UL508	UL508	UL508	UL98	UL98	UL98	UL98
<b>Technical ratings – UL, CSA <sup>②</sup></b>										
Max operating voltage	V	600	600	600	600	600	600	600	600	600
Max horsepower rating										
Three phase										
200 – 208V	HP	3	7.5	10	15	20	10	20	25	30
240V	HP	5	7.5	10	15	20	10	20	30	40
480V	HP	10	15	20	30	40	20	40	50	75
600V	HP	10	20	25	30	40	30	40	50	100
Single phase										
120V	HP	1	1.5	2	2	2	2	3	5	7.5
240V	HP	2	3	5	5	5	5	7.5	15	20
<b>Technical ratings – IEC <sup>②</sup></b>										
Rated insulation and operational voltage, AC20 and DC20	V	750	750	750	750	750	750	750	750	750
Rated thermal current, I <sub>n</sub>										
AC 20/DC 20 open	A	25	32	40	63	80	40	63	115	200
AC 20/DC 20 enclosed	A	25	32	40	63	80	40	63	115	160
AC 21A ≤500V	A	16	25	32	63	80	40	63	100	160
AC 21A ≤690V	A	16	25	32	63	80	40	63	100	160
Rated operational power AC23										
400/415V	kW	7.5	9	11	22	37	15	18.5	37	75
690V	kW	7.5	9	11	15	18.5	15	15	37	75
<b>Physical characteristics</b>										
Weight <sup>③</sup>	3 pole lb	0.24	0.24	0.24	0.59	0.59	0.79	0.79	0.79	2.42
Dimension	3 pole H in	2.68	2.68	2.68	3.60	3.60	3.94	3.94	3.94	5.00
	W in	1.38	1.38	1.38	2.07	2.07	2.76	2.76	2.76	4.96
	D in	2.20	2.20	2.20	2.85	2.85	2.95	2.95	2.95	2.93
<b>Accessories</b>										
Terminal lug kit		Integral	Integral	Integral	Integral	Integral	Integral	Integral	Integral	Integral
Terminal shroud		•	•	•	•	•	•	•	•	—
Auxiliary contact		•	•	•	•	•	•	•	•	•
Handle UL/NEMA type										
Type 1, 3R, 12		•	•	•	•	•	•	•	•	•
Type 1, 3R, 4, 4X, 12		•	•	•	•	•	•	•	•	•
Handle type										
Selector		•	•	•	•	•	•	•	•	—
Pistol		•	•	•	•	•	•	•	•	•
Conversion kits										
6 pole		•	•	•	•	•	•	•	•	•
Transfer		•	•	•	•	•	•	•	•	•
Bypass		•	•	•	•	•	•	•	•	•
Mechanical interlock		•	•	•	•	•	•	•	•	•
Electrical interlock		—	—	—	—	—	—	—	—	—

17

• = Available  
— = Not available

**UL listed, CSA approved, IEC rated, CE marked**

<sup>①</sup> UL listed switches are also CSA approved.  
<sup>②</sup> For complete technical information please see page 17.40 – 17.73.  
<sup>③</sup> Switch only.