
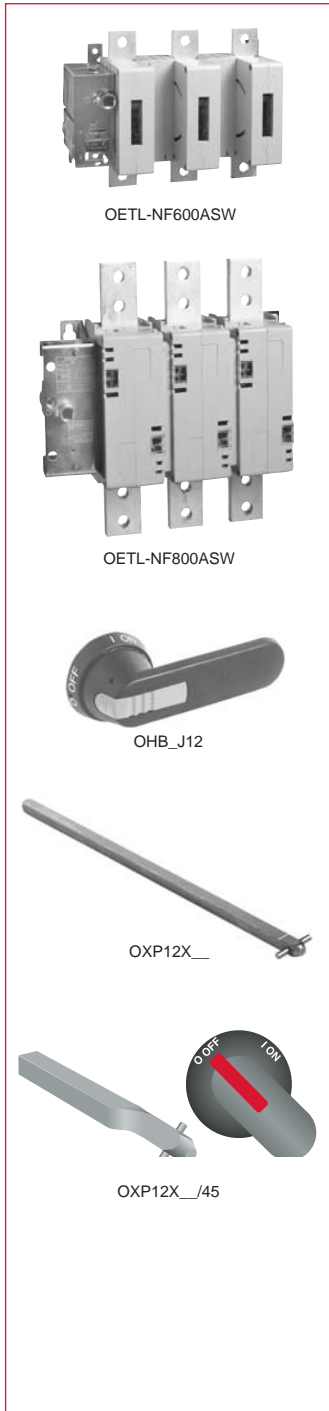


400A – 800A

Disconnect switches
Non-fusible

For a complete assembly, please select one of each:

- 1 switch
- 1 handle
- 1 shaft
- 1 terminal lug kit

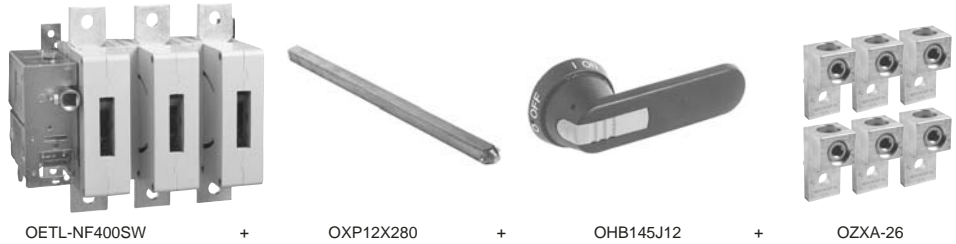

400 – 800 Amp switches, 600V

UL general purpose amp rating	IEC AC21 amp rating	Maximum horsepower rating					Catalog number	List price
		200V	208V	240V	480V	600V		
2 pole							2 pole	
400	630	—	—	—	—	—	OETL-NF4002SW	\$ 1280
600	800	—	—	—	—	—	OETL-NF600A2SW	2000
800	1250	—	—	—	—	—	OETL-NF800A2SW	2600
3 pole							3 pole	
400	630	100	100	125	250	350	OETL-NF400SW	1420
600	800	150	150	200	400	500	OETL-NF600ASW	2200
800	1250	200	200	250	500	600	OETL-NF800ASW	4200
4 pole							4 pole	
400	630	100	100	125	250	350	OETL-NF4004SW	1800
600	800	150	150	200	400	500	OETL-NF600A4SW	2800
—	1250	200	200	250	500	600	OETL-NF800A4SW	5200

Pistol handles — for use with shafts $\square .47 \times .47"$ ($\square 12 \times 12 \text{ mm}$)

UL/NEMA type	IEC type	Color	Length in/mm	Marking	Defeat-able	Padlock-able	Weight (lbs)	Catalog number	List price
1,3R,12	IP65	Blk	4.9/125	O/I & Off/On	Yes	Yes	0.39	OHB125J12	\$ 90
1,3R,12	IP65	R/Y	4.9/125	O/I & Off/On	Yes	Yes	0.39	OHY125J12	90
1,3R,12	IP65	Blk	5.7/145	O/I & Off/On	Yes	Yes	0.39	OHB145J12	90
1,3R,12	IP65	R/Y	5.7/145	O/I & Off/On	Yes	Yes	0.39	OHY145J12	90
1,3R,12	IP65	Blk	6.9/175	O/I & Off/On	Yes	Yes	0.41	OHB175J12	100
1,3R,12	IP65	R/Y	6.9/175	O/I & Off/On	Yes	Yes	0.41	OHY175J12	100
1,3R,4,4X,12	IP66	Blk	5.7/145	O/I & Off/On	Yes	Yes	0.39	OHB145L12	130
1,3R,4,4X,12	IP66	R/Y	5.7/145	O/I & Off/On	Yes	Yes	0.39	OHY145L12	130
1,3R,4,4X,12	IP66	Blk	6.9/175	O/I & Off/On	Yes	Yes	0.41	OHB175L12	140
1,3R,4,4X,12	IP66	R/Y	6.9/175	O/I & Off/On	Yes	Yes	0.41	OHY175L12	140
1,3R,4,4X,12	IP65	Metal	8.7/220	Off/On	—	Yes	1.50	YASDA-8	190

Shafts — for use with pistol handles $\square .47 \times .47"$ ($\square 12 \times 12 \text{ mm}$)

Shaft length inches/mm	Mounting depth ^① in inches	Weight (lbs)	Catalog number	List price
11.0/280	10.2 – 14.5	0.77	OXP12X280	\$ 36
12.8/325	12.0 – 16.3	0.90	OXP12X325	40
15.6/395	14.8 – 19.1	1.10	OXP12X395	44
18.3/465	17.5 – 21.9	1.32	OXP12X465	48
21.1/535	20.3 – 24.6	1.54	OXP12X535	52

Twisted shafts — Rotates handle 45° $\square .47 \times .47"$ ($\square 12 \times 12 \text{ mm}$)

Shaft length inches/mm	Mounting depth ^① in inches	Weight (lbs)	Catalog number	List price
11.0/280	10.2 – 14.5	0.77	OXP12X280-45	\$ 36
12.8/325	12.0 – 16.3	0.90	OXP12X325-45	40
18.3/465	17.5 – 21.9	1.32	OXP12X465-45	48

① Mounting depth is the distance from the outside of the door to the disconnect switch mounting plate. Shaft can be cut to desired length.