



400A – 800A Accessories


Disconnect
switches
Non-fusible




OETL-ZX108




OETL-ZX95

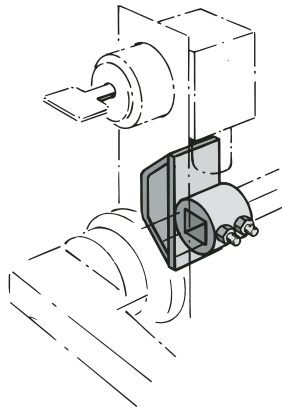

OETL-ZW5



OETL-ZT80_



OETL-ZT100

90° angle kit

Description	For use on:	Weight (lbs)	Catalog number	List price
Converts switch mechanism from front operation to side operation	OETL-NF400 – OETL-NF800A	4.63	OETL-ZX108	\$ 794

Shaft extension coupler

Description	For use on:	Weight (lbs)	Catalog number	List price
Joins two shafts together for applications where extended length is required	12mm shafts	0.26	OETL-ZX95	\$ 100

Locking accessories

Description	For use on:	Weight (lbs)	Catalog number	List price
Cam attachment for Kirk Key, Castell, Lowe & Fletcher and Ronis interlock. For adapting to the interlock system. The interlock is not included.	12mm shafts	0.29	OETL-ZW5	\$ 190
Electrical interlock ① Closed circuit principle for interlocking the switch movement. When the coil circuit is dead, A-types cannot be operated to ON-position and L-types cannot be operated to ON- or OFF-position. Coil voltages 110VAC, 220VAC, 24VDC, 48VDC, 60 VDC, 110VDC, 220VDC, P = 15W U = 0.7 – 1.1 Un (U = coil voltage, Un = nominal voltage)	OETL-NF400 – OETL-NF800A	2.42	OETL-ZT 80A★ OETL-ZT 80L★	1280 1220
Mounting bracket	OETL-NF400 – OETL-NF600	0.40	OETL-ZT100	40

★ – Coil voltage



① OETL-ZT100 mounting bracket required for OETL-NF400 & OETL-NF600