


## Kits

30A – 800A, 600V, 3 pole ①  
UL fuse class J, CC, T, L

Each kit includes:  
1 three pole switch  
1 handle  
1 shaft  
1 terminal lug kit

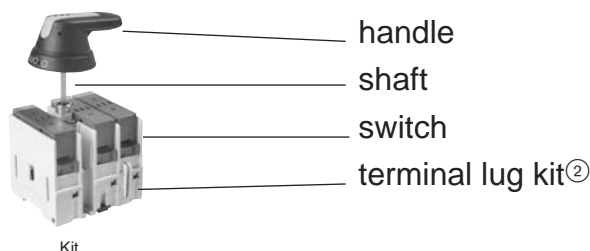

### Kits with selector handles

UL general purpose amp rating	UL Fuse type 600V	Maximum horsepower rating					Kit catalog number	List price
		Three phase						
		200V	208V	240V	480V	600V		
30	J	5	7.5	7.5	15	20	OSJ30B2A1-180	<b>\$ 314</b>
30	CC	5	7.5	7.5	15	20	OSC30B2A1-180	<b>314</b>

### Kits with pistol handles

UL general purpose amp rating	UL Fuse type 600V	Maximum horsepower rating					Kit catalog number	List price
		Three phase						
		200V	208V	240V	480V	600V		
30	J	5	7.5	7.5	15	20	OSJ30B6-150	<b>\$ 374</b>
30	CC	5	7.5	7.5	15	20	OSC30B6-150	<b>374</b>
60	J	15	15	15	30	50	OSJ60B6-150	<b>472</b>
100	J <sup>②</sup>	25	25	30	60	75	OSJ100B8-150	<b>646</b>
200	J <sup>③</sup>	50	50	60	125	150	OSJ200B4-280	<b>1586</b>
400	J <sup>③</sup>	100	125	125	250	350	OSJ400B4-280	<b>2176</b>
600	J <sup>③</sup>	150	150	200	400	500	OSJ600B4-280	<b>3406</b>
800	L	200	200	250	500	600	OSL800B4-280	<b>5266</b>

### Components for kits with selector handles

Kit catalog number	Switch	Handle ④				Shaft			Terminal lugs		
	Catalog number	NEMA type	De-Marking	Handle feat-able	Mounting catalog number	Length depth <sup>⑤</sup> (inches)	Shaft (inches/mm)	catalog number	Wire size	Wire type	Catalog number
OSJ30B2A1-180	OS30AJ12	1, 3R, 12	I/O & Off/On	—	OHB2AJ1	6.3 - 9.5	7.1/180	OXS5X180	#18 - 8	Cu	Integral
OSC30B2A1-180	OS30ACC12	1, 3R, 12	I/O & Off/On	—	OHB2AJ1	6.3 - 9.5	7.1/180	OXS5X180	#18 - 8	Cu	Integral

### Components for kits with pistol handles

Kit catalog number	Switch	Handle ④				Shaft			Terminal lugs		
	Catalog number	NEMA type	De-Marking	Handle feat-able	Mounting catalog number	Length depth <sup>⑤</sup> (inches)	Shaft (inches/mm)	catalog number	Wire size	Wire type	Catalog number
OSJ30B6-150	OS30AJ12	1, 3R, 12	I/O & Off/On	Yes	OHB65J5	5.3 - 8.3	5.9/150	OSP5X150	#18 - 8	Cu	Integral
OSC30B6-150	OS30ACC12	1, 3R, 12	I/O & Off/On	Yes	OHB65J5	5.3 - 8.3	5.9/150	OSP5X150	#18 - 8	Cu	Integral
OSJ60B6-150	OS60J12	1, 3R, 12	I/O & Off/On	Yes	OHB65J6	5.5 - 8.5	5.9/150	OSP6X150	#14 - 4	Cu	Integral
OSJ100B8-150	OS100J03	1, 3R, 12	I/O & Off/On	Yes	OHB80J6	5.5 - 8.5	5.9/150	OSP6X150	#14 - 2/0	Cu/Al	OZXA-24
OSJ200B4-280	OES200J3	1, 3R, 12	I/O & Off/On	Yes	OHB145J12	7.9 - 12.2	11.0/280	OSP12X280	#6 - 300kcmil	Cu/Al	OZXA-25
OSJ400B4-280	OES400J3	1, 3R, 12	I/O & Off/On	Yes	OHB145J12	7.9 - 12.2	11.0/280	OSP12X280	#2 - 600kcmil	Cu/Al	OZXA-26
OSJ600B4-280	OES600J3	1, 3R, 12	I/O & Off/On	Yes	OHB145J12	11.2 - 14.0	11.0/280	OSP12X280	(2) #2 - 600kcmil	Cu/Al	OZXA-27
OSL800B4-280	OES800J3	1, 3R, 12	I/O & Off/On	Yes	OHB145J12	11.2 - 14.0	11.0/280	OSP12X280	(2) #2 - 600kcmil	Cu/Al	OZXA-27

If other handles or shafts are desired, please order from the individual component pages 17.83 – 17.95.

① Other pole configurations available. Please see the individual component pages.

② 30A and 60-A fusible switches include standard integral terminal lugs.

③ J type fuse clips are standard. If 600V Type "T" fuse clips are desired, please select a fuse adapter kit from the individual component pages.

④ All handles are black and accept three padlocks. For others, please see the individual component pages.

⑤ Mounting depth is the distance from the outside of the door to the disconnect switch mounting plate. Shaft can be cut to desired length.