


Individual capacitors Pump jack 240 & 480 Volt, 60 Hz

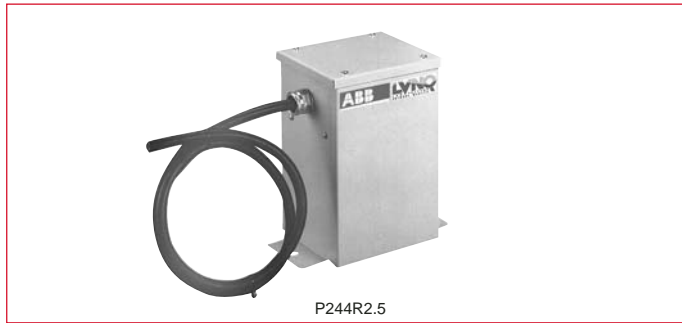

The CLMD-PJ capacitor is ideally suited for oil-field pumping units and other outdoor applications. Standard features include:

- Outdoor, weatherproof enclosure
- 4 feet of 10 gauge, 4-conductor wire for ease of installation
- Convenient pole-mounting design
- Lightweight, totally dry construction

Steel enclosure – 240 Volt, 60 Hz, 3 phase

Enclosure size	kvar rating	Approx. weight (lbs.)	Catalog number	List price
43	2.5	8	P24R2.5	\$ 220
	3.5	8	P24R3.5	241
	5	8	P24R5	273
	10	8	P24R10	305
	12.5	13	P24R12.5	364
	14	8	P24R14	412
	15	8	P24R15	434

208 Volt availability

For 208 volt applications, derate the 240V capacitors. The kvar at 208V will be .75 times the kvar at 240V.

Steel enclosure – 480 Volt, 60 Hz, 3 phase

Enclosure size	kvar rating	Approx. weight (lbs.)	Catalog number	List price
43	1.5	8	P44R1.5	\$ 193
	2	8	P44R2	198
	3	8	P44R3	209
	4	8	P44R4	220
	5	8	P44R5	231
	6	8	P44R6	241
	7.5	8	P44R7.5	247
	10	8	P44R10	257
	15	8	P44R15	289
	20	13	P44R20	370
	21	13	P44R21	380
	22.5	13	P44R22.5	402
	25	13	P44R25	423
	27	13	P44R27	445
	30	13	P44R30	477

NOTE: ABB's patented IPE design eliminates the need for additional overcurrent protection when capacitors are electrically connected on the load side of a motor starter circuit breaker or fusible disconnect switch.

Availability to be announced.
Please consult ABB