


Approximate dimensions

2 speed, 2 winding
A/AE26 – AF750, AC & DC operated, 3 pole

00.00 Inches
00.00 [Millimeters]

A26 – AF750 – 2 Speed, 2 Winding

3

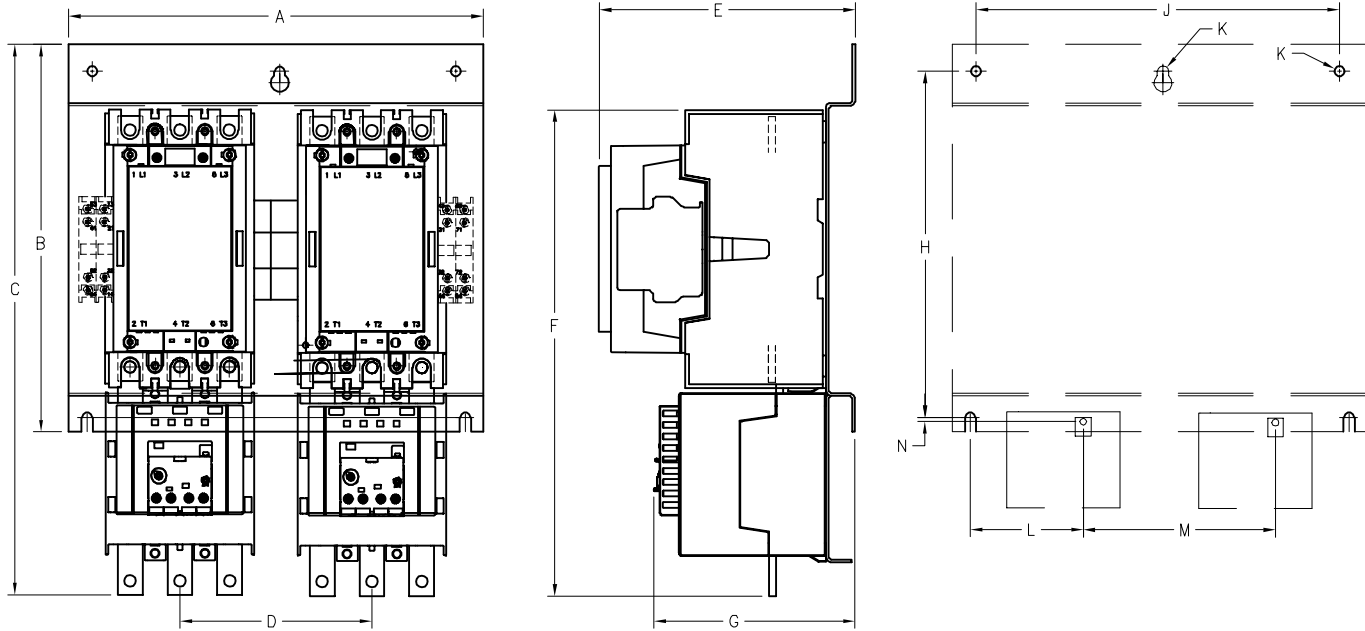

Item	A	B	C	D	E	F	G	H	J	K	L	M	N
A26	5.25 133	5.79 147	6.95 177	2.6 66	4.02 102	5.78 147	4.64 118	4.64 118	4.64 118	0.22 6	1.77 45	2.72 69	0.36 9
A30 - A40	5.25 133	5.25 133	7.25 191	2.43 62	4.9 150	5.85 149	4.42 112	4.64 118	4.64 118	0.22 6	1.77 45	2.72 69	0.36 9
A50 - A75	6.62 168	6.5 165	8.25 210	3.42 87	4.54 115	6.9 175	4.82 122	5.87 149	6 152	0.22 6	2.36 60	335 85	0.2 5
A95-A110	8.7 221	8.1 206	11.45 291	4.14 105	5.17 131	9.39 239	5.42 138	7.28 185	7.91 200	0.31 8	2.36 60	4.4 111	0.83 21
A145-A185+TA200	11.5 292	10.75 273	14.6 371	3.31 84	7.03 179	12.69 322	5.7 145	9.6 244	10.09 256	0.31 8	3.13 80	5.33 135	0.51 13
A145-A185+E200	11.5 292	10.75 273	15.27 388	2.76 70	7.11 181	13.48 342	5.58 142	9.6 244	10.09 256	0.31 8	-	-	-
A210-A300+TA450	11.5 292	10.75 273	14.35 364.5	2.76 70	7.11 180	14.18 360	6.81 173	9.6 244	10.09 256	0.31 8	-	-	-
A210-A300+E320	14.25 362	11.75 298	16.98 431	3.45 88	7.92 201	15.29 388	5.6 142	10.6 269	12.84 326	0.31 8	-	-	-
A400-A460+E500	18 457	14.25 362	19.61 498	2.48 63	9.3 236	16.68 423	6.62 168	11.32 288	16.83 427	0.31 8	-	-	-
A580-A750+E800	19.75 502	14.25 362	20.2 513	3.27 83	10.05 255	17.41 442	8.33 212	13.1 333	18.75 476	0.31 8	-	-	-