


Open 3A – 25A

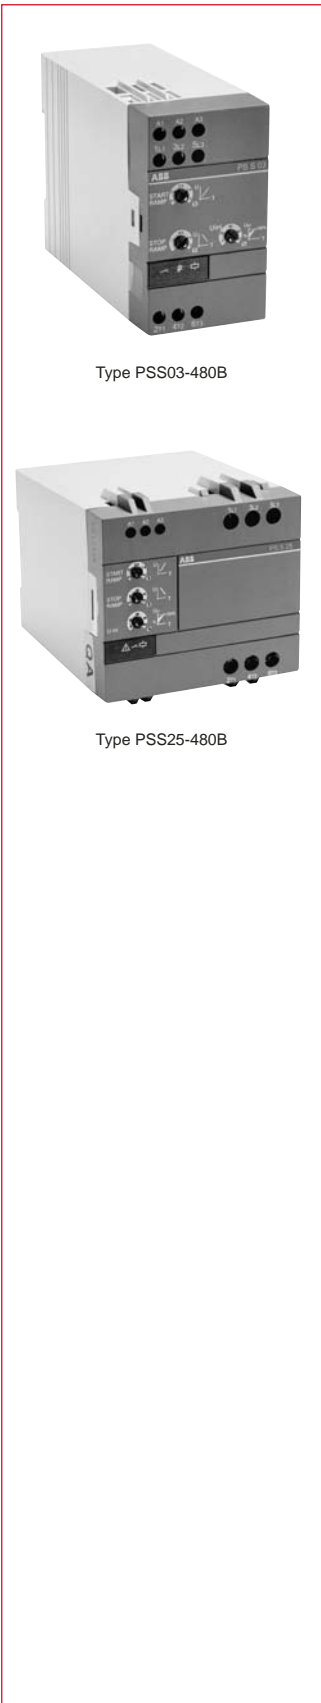

Type PSS03-480B

Type PSS25-480B

PSS Open type ①②

Operating voltage 50Hz – 60Hz	Maximum HP rating three phase	Maximum current amperes	Catalog number	List price
220 – 240V	0.5	3	PSS03-220B	\$ 270
	3	12	PSS12-220B	345
	7.5	25	PSS25-220B	405
380 – 415V	1	3	PSS03-400B	270
	5	12	PSS12-400B	345
	10	25	PSS25-400B	405
440 – 480V	1.5	3	PSS03-480B	270
	7.5	12	PSS12-480B	345
	15	25	PSS25-480B	405
550 – 600V	10	12	PSS12-600B	375
	20	25	PSS25-600B	445

6

① Overload protection not included; external overload relay must be in power circuit. Use ABB TA series overload.
 ② See page 6.12 for single phase wiring schematic.