


**Approximate dimensions**  
**Enclosed**  
**208V – 600V**

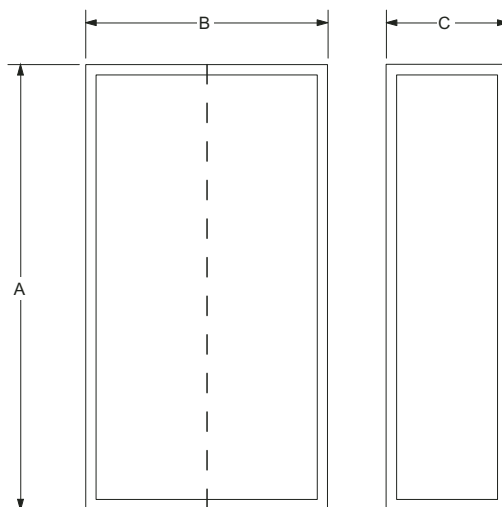

6

**Enclosed, 208V – 600V**

Combination	In-Line			Inside Delta		
	A	B	C	A	B	C
<b>PST30 – PST72</b>						
Softstarter only	20	20	12	20	20	12
Softstarter with bypass	20	20	12	20	20	12
Softstarter with fused disconnect	24	20	12	24	20	12
Softstarter with circuit breaker	24	20	12	24	20	12
<b>PST85 – PST142</b>						
Softstarter only	24	24	12	36	24	12
Softstarter with bypass	24	24	12	36	24	12
Softstarter with fused disconnect	30	30	12	42	36	12
Softstarter with circuit breaker	24	24	12	42	36	12
<b>PST175 – PST300</b>						
Softstarter only	30	24	12	42	30	12
Softstarter with bypass	30	24	12	42	30	12
Softstarter with fused disconnect	36	36	12	48	36	12
Softstarter with circuit breaker	36	36	12	48	36	12

Combination	In-Line			Inside Delta		
	A	B	C	A	B	C
<b>PSTB370 – PSTB470</b>						
Softstarter only	48	36	16	48	36	16
Softstarter with bypass (internal)	48	36	16	48	36	16
Softstarter with fused disconnect	87	36	24	87	36	24
Softstarter with circuit breaker	48	36	16	48	36	16
<b>PSTB570 – PSTB720</b>						
Softstarter only	48	36	16	87	36	24
Softstarter with bypass (internal)	48	36	16	87	36	24
Softstarter with fused disconnect	87	36	24	87	48	24
Softstarter with circuit breaker	87	36	24	87	48	24
<b>PSTB840 – PSTB1050</b>						
Softstarter only	87	36	24	87	36	24
Softstarter with bypass (internal)	87	36	24	87	36	24
Softstarter with fused disconnect	87	48	24	87	48	24
Softstarter with circuit breaker	87	48	24	87	48	24