


Assembled 40mm, IP 65, UL Type 4

Movement to be detected

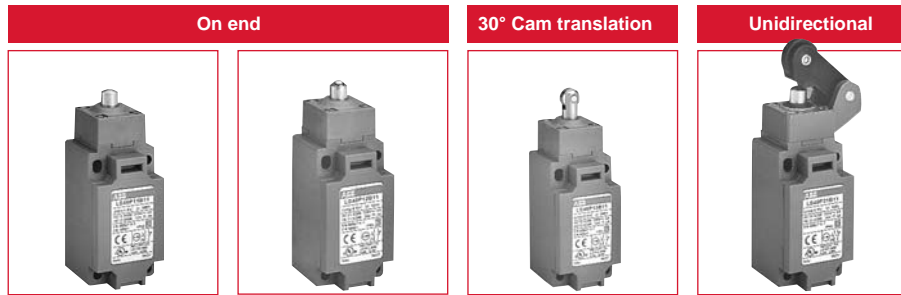

Operating head type

	Steel plain plunger	Steel ball plunger	Steel roller plunger	Polyamide roller lever
Conformity / (N.C. contact with positive opening operation)	EN 50 041	EN 50 041	EN 50 041	
Maximum actuation speed m/s	0.5	0.5	0.5	1
Min. force/torque:				
- actuation	22 N	22 N	16 N	12 N
- positive opening operation	66 N	66 N	48 N	40 N

9

	Catalog number	LS45P11B11	LS45P12B11	LS45P13B11	LS45P31B11
Snap action contacts	List price	\$ 30	\$ 32	\$ 37	\$ 34
	Operation diagram				
Non-overlapping Slow action contacts	Catalog number	LS45P11D11	LS45P12D11	LS45P13D11	LS45P31D11
	List price	32	34	39	36
	Operation diagram				
Overlapping Slow action contacts	Catalog number	LS45P11C11	LS45P12C11	LS45P13C11	LS45P31C11
	List price	33	35	40	37
	Operation diagram				
Slow action contacts	Catalog number	LS45P11L02	LS45P12L02	LS45P13L02	LS45P31L02
	List price	33	35	40	37
	Operation diagram				
Slow action contacts	Catalog number	LS45P11L20	LS45P12L20	LS45P13L20	LS45P31L20
	List price	33	35	40	37
	Operation diagram				
Snap action contacts	Catalog number	LS45P11B02	LS45P12B02	LS45P13B02	LS45P31B02
	List price	33	35	40	37
	Operation diagram				
Weight (packing per unit)	kg	0.140	0.140	0.145	0.175

Dimensions (mm)

