


Assembled 40mm, IP 65, UL Type 4

Movement to be detected

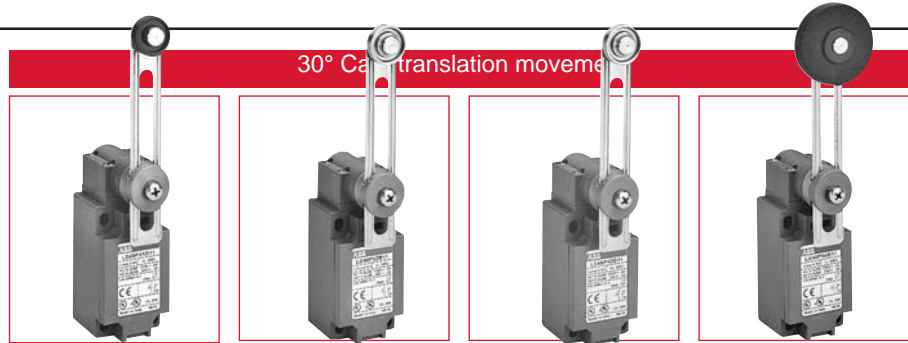

Operating head Catalog number

		Adjustable Ø 22 polyamide roller lever	Adjustable Ø 22 stainless steel roller lever	Adjustable Ø 22 stainless steel ball-bearing roller lever	Adjustable Ø 45 rubber roller lever
Conformity / (N.C. contact with positive opening operation)		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Maximum actuation speed	m/s	1.5	1.5	1.5	1.5
Min. torque: - actuation	N.m	0.15	0.15	0.15	0.15
- positive opening operation	N.m	—	—	—	—

9

		LS45P51B11 \$ 39	LS45P52B11 \$ 47	LS45P53B11 \$ 43	LS45P54B11 \$ 41
Snap action contacts	Catalog number List price	LS45P51B11 \$ 39	LS45P52B11 \$ 47	LS45P53B11 \$ 43	LS45P54B11 \$ 41
	Operation diagram				
Non-overlapping Slow action contacts	Catalog number List price	LS45P51D11 42	LS45P52D11 50	LS45P53D11 46	LS45P54D11 44
	Operation diagram				
Overlapping Slow action contacts	Catalog number List price	LS45P51C11 43	LS45P52C11 52	LS45P53C11 47	LS45P54C11 45
	Operation diagram				
Slow action contacts	Catalog number List price	LS45P51L02 43	LS45P52L02 52	LS45P53L02 47	LS45P54L02 45
	Operation diagram				
Slow action contacts	Catalog number List price	LS45P51L20 43	LS45P52L20 52	LS45P53L20 47	LS45P54L20 45
	Operation diagram				
Snap action contacts	Catalog number List price	LS45P51B02 43	LS45P52B02 52	LS45P53B02 47	LS45P54B02 45
	Operation diagram				
Weight (packing per unit)	kg	0.190	0.200	0.200	0.200

Dimensions (in mm)

