


Assembled 40mm, IP 65, UL Type 4

Plastic
Limit switches

Movement to be detected

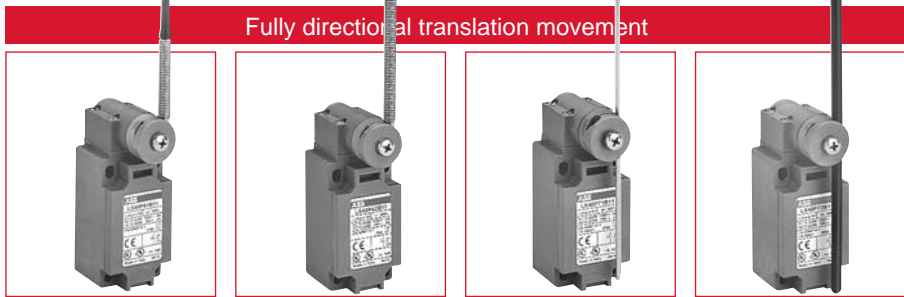

Operating head type

	Flexible lever with insulated end	Coil spring lever	Adjustable Ø 3 stainless steel rod lever	Adjustable ø 6 polyamide rod lever
Conformity / (N.C. contact with positive opening operation)			EN 50 041	EN 50 041
Maximum actuation speed	m/s	1.5	1.5	1.5
Min. torque: - actuation	N.m	0.15	0.15	0.15
- positive opening operation	N.m	-	-	-

		LS45P61B11 \$ 41	LS45P62B11 \$ 41	LS45P71B11 \$ 38	LS45P72B11 \$ 38
Snap action contacts	Catalog number	LS45P61B11	LS45P62B11	LS45P71B11	LS45P72B11
	List price	\$ 41	\$ 41	\$ 38	\$ 38
	Operation diagram				
Non-overlapping Slow action contacts	Catalog number	LS45P61D11	LS45P62D11	LS45P71D11	LS45P72D11
	List price	44	44	41	41
	Operation diagram				
Overlapping Slow action contacts	Catalog number	LS45P61C11	LS45P62C11	LS45P71C11	LS45P72C11
	List price	46	45	43	42
	Operation diagram				
Slow action contacts	Catalog number	LS45P61L02	LS45P62L02	LS45P71L02	LS45P72L02
	List price	46	45	43	42
	Operation diagram				
Slow action contacts	Catalog number	LS45P61L20	LS45P62L20	LS45P71L20	LS45P72L20
	List price	46	45	43	42
	Operation diagram				
Snap action contacts	Catalog number	LS45P61B02	LS45P62B02	LS45P71B02	LS45P72B02
	List price	46	45	43	42
	Operation diagram				
Weight (packing per unit)	kg	0.190	0.190	0.185	0.185

Dimensions (in mm)

