


## Assembled 40mm, IP 65, UL Type 4

### Movement to be detected

### Multidirectional

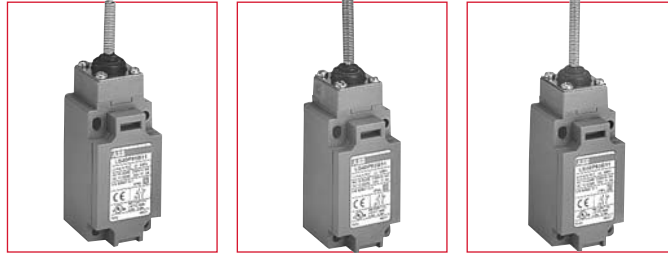

### Operating head type

	Spring rod	Flexible rod with insulated end	Coil spring rod
Conformity / $\ominus$ (N.C. contact with positive opening operation)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Maximum actuation speed	1	1	1
Min. torque: - actuation	0.18	0.18	0.18
- positive opening operation	-	-	-

9

Operating head type	Catalog number	LS45P91B11	LS45P92B11	LS45P93B11
Snap action contacts	List price	\$ 32	\$ 35	\$ 33
	Operation diagram			
Non-overlapping Slow action contacts	Catalog number	LS45P91D11	LS45P92D11	LS45P93D11
List price	34	37	35	
	Operation diagram			
Overlapping Slow action contacts	Catalog number	LS45P91C11	LS45P92C11	LS45P93C11
List price	35	38	37	
	Operation diagram			
Slow action contacts	Catalog number	LS45P91L02	LS45P92L02	LS45P93L02
List price	35	38	37	
	Operation diagram			
Slow action contacts	Catalog number	LS45P91L20	LS45P92L20	LS45P93L20
List price	35	38	37	
	Operation diagram			
Snap action contacts	Catalog number	LS45P91B02	LS45P92B02	LS45P93B02
List price	35	38	37	
	Operation diagram			
Weight (packing per unit)	kg	0.135	0.140	0.145

### Dimensions (in mm)

