


## Components

40mm, IP 65, UL Type 4

- Bodies with contact block
- Operating heads with actuator

9

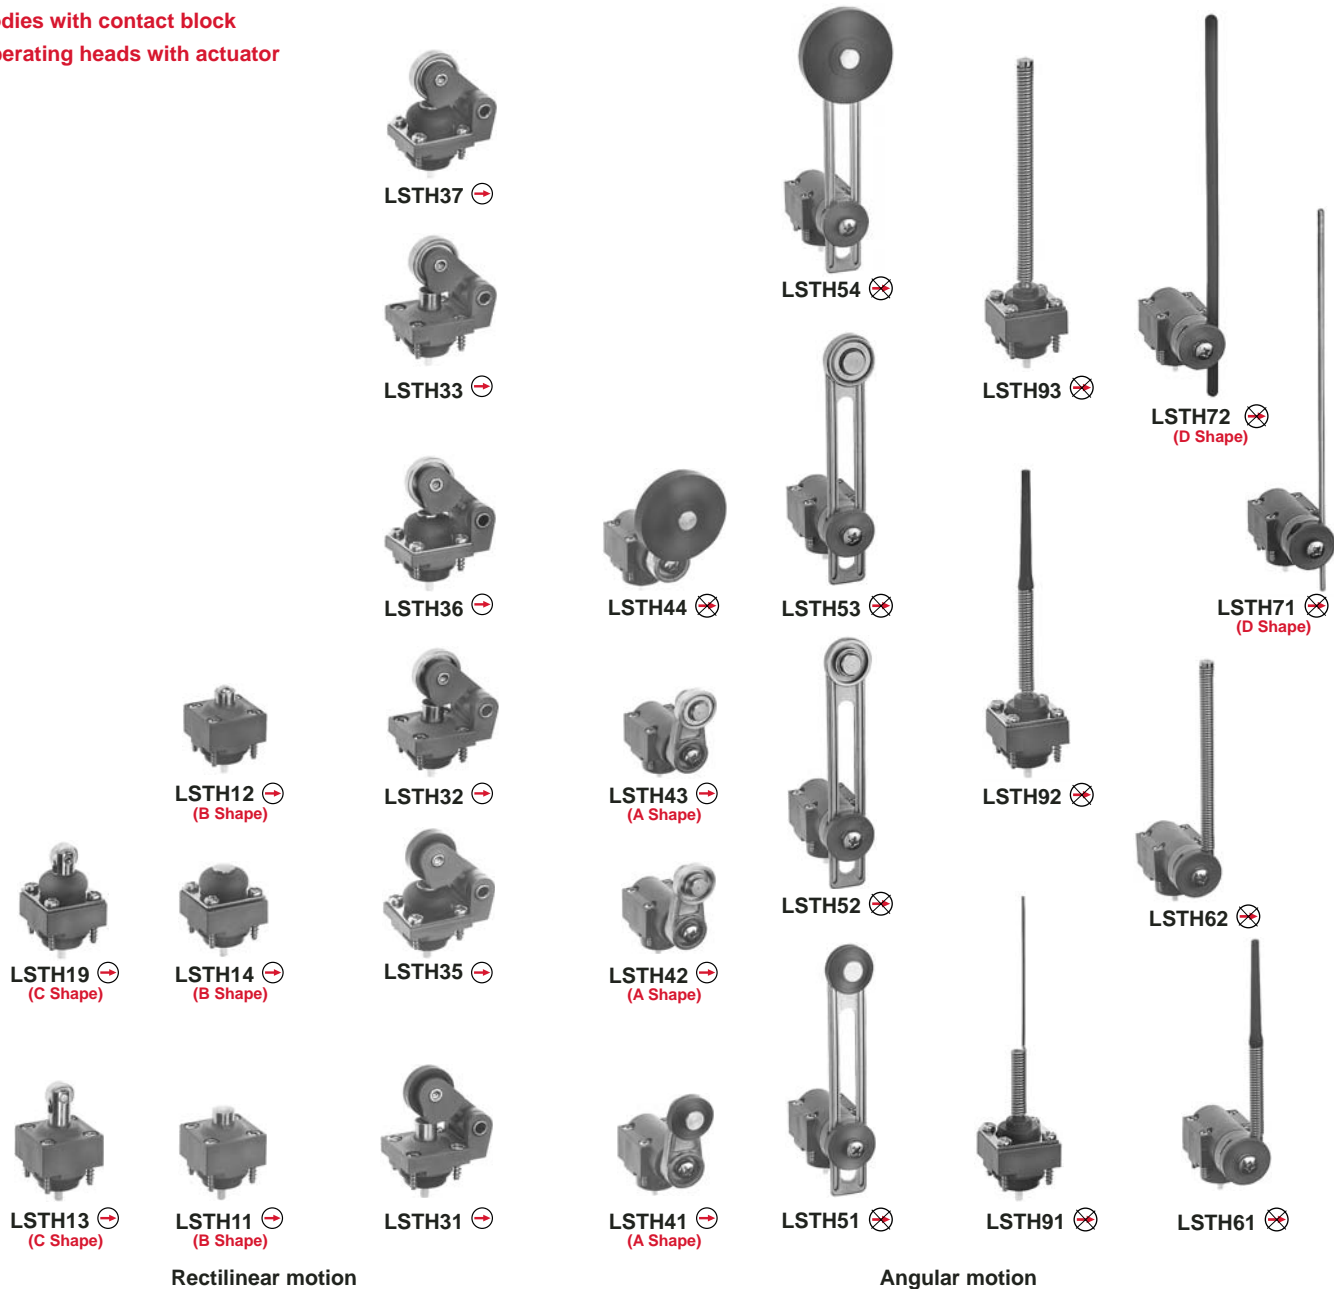

### LSTH... rectilinear motion heads

- To be actuated from end.  
With plunger (plain or with ball): LSTH11, LSTH12 and LSTH14.
- To be actuated by 30° cam translation.  
With roller plunger: LSTH13, LSTH19.
- To be actuated unidirectionally by 30° cam translation.  
With roller lever on steel plunger: LSTH31 ... LSTH37.

### LSTH... angular motion heads

- To be actuated by 30° cam translation.  
With roller lever: LSTH41 ... LSTH54.
- To be actuated by fully directional translation movement.  
With rod or spring lever: LSTH61 ... LSTH72.
- To be actuated multidirectionally.  
With spring rod: LSTH91 ... LSTH93.



### Bodies with contact block

➔ LS45P00B11, LS45P00D11, LS45P00C11, LS45P00L02, LS45P00B02

⊗ LS45P00L20

Suitable for positive opening operation (IEC 60947-5-1 and EN 50041).

**Warning!** The positive opening operation of limit switch is only guaranteed if the elements noted with ➔ are fitted.