


# Assembled IP66, UL Type 4X 60mm

## Movement to be detected

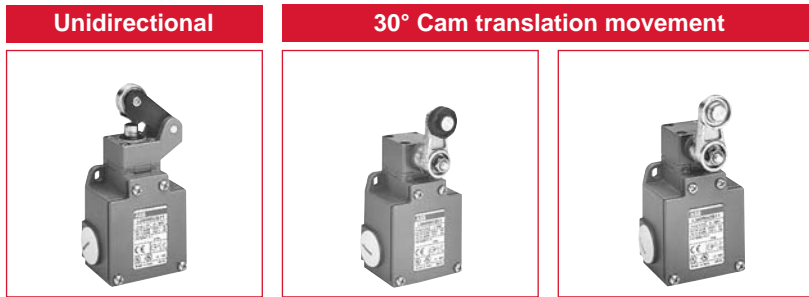

## Operating head type

	Ball-bearing roller lever	∅ 22 Polyamide roller lever	∅ 22 Stainless steel roller lever
Conformity / $\ominus$ (N.C. contact with positive opening operation)			
Maximum actuation speed m/s	1.5	1.5	1.5
Min. force/torque:			
- actuation	12 N	0.15 N.m	0.15 N.m
- positive opening operation	40 N	0.44 N.m	0.44 N.m

9

		Ball-bearing roller lever	∅ 22 Polyamide roller lever	∅ 22 Stainless steel roller lever
Snap action contacts	Catalog number List price	LS65M33B11 \$ 47	LS65M41B11 \$ 51	LS65M42B11 \$ 58
	Operation diagram			
Non-overlapping Slow action contacts	Catalog number List price	LS65M33D11 51	LS65M41D11 55	LS65M42D11 63
	Operation diagram			
Overlapping Slow action contacts	Catalog number List price	LS65M33C11 52	LS65M41C11 57	LS65M42C11 65
	Operation diagram			
Slow action contacts	Catalog number List price	LS65M33L02 52	LS65M41L02 57	LS65M42L02 65
	Operation diagram			
Slow action contacts	Catalog number List price	LS65M33L20 52	LS65M41L20 57	LS65M42L20 65
	Operation diagram			
Snap action contacts	Catalog number List price	LS65M33B02 52	LS65M41B02 57	LS65M42B02 65
	Operation diagram			
Weight (packing per unit)	kg	0.300	0.300	0.305

## Dimensions (mm)

