


Components

IP66, UL Type 4X
60mm

Metal
Limit switches

- Bodies with contact block
- Operating heads with actuator

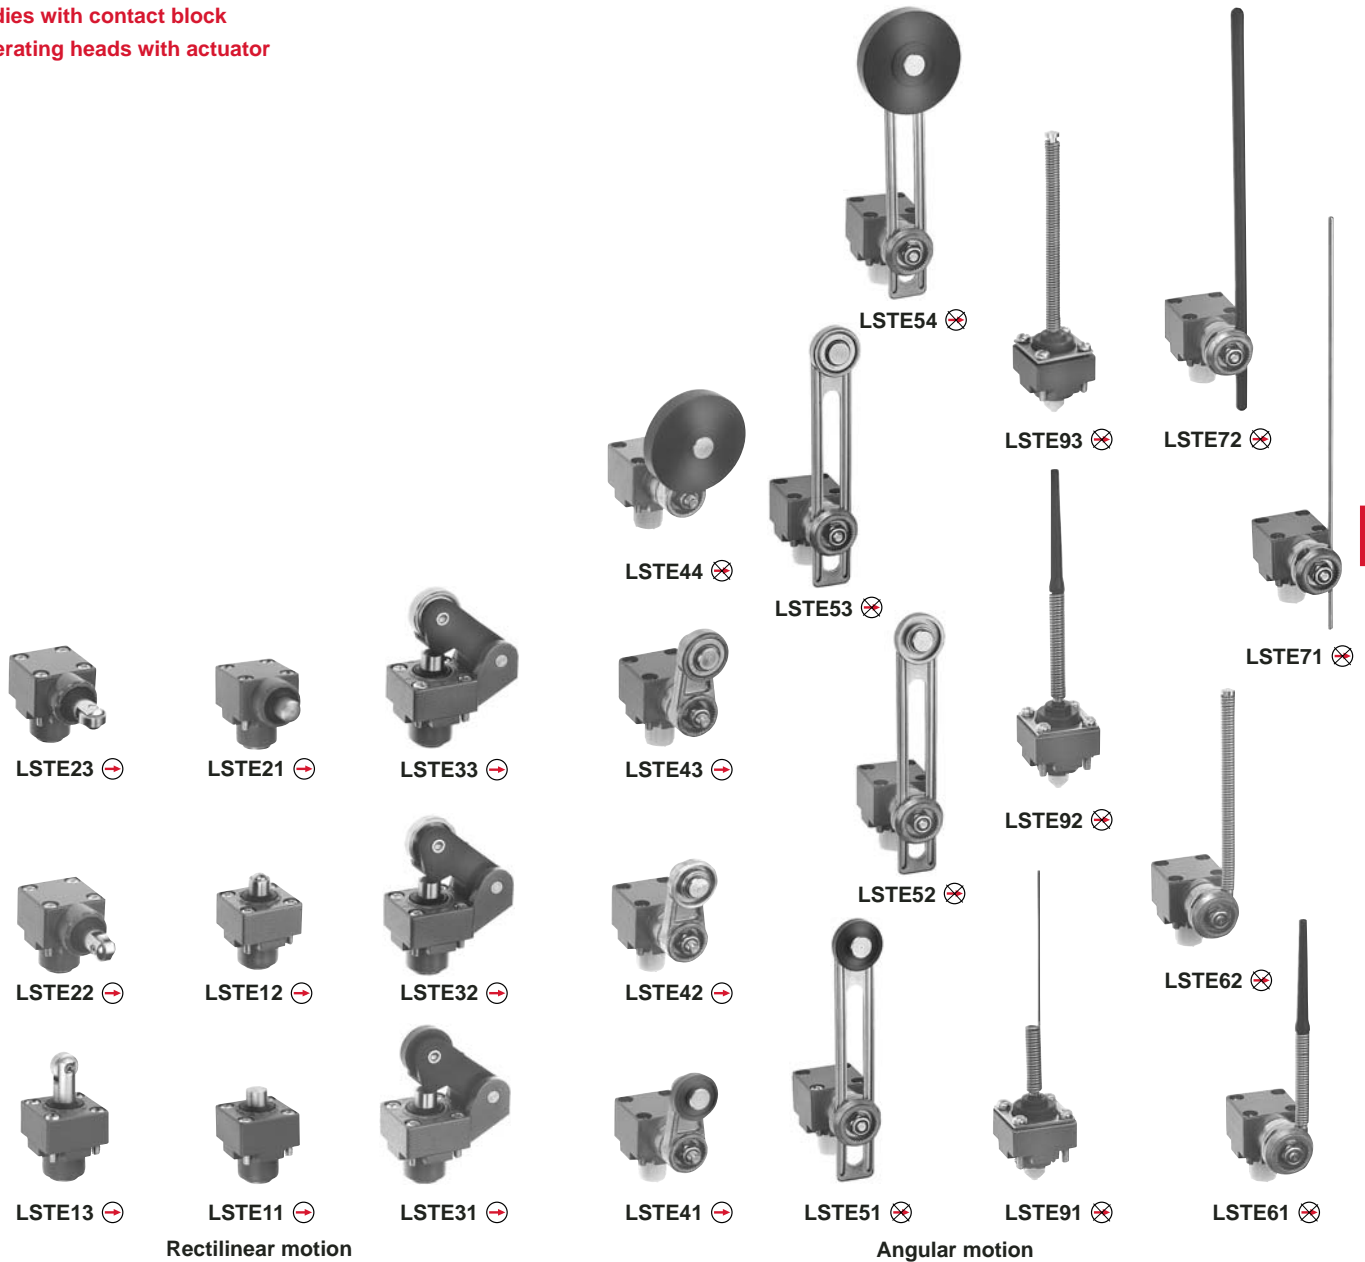

LSTE... rectilinear motion heads

- To be actuated from end. With plunger (plain, lateral plain or ball): LSTE11, LSTE12 and LSTE21.
- To be actuated by 30° cam translation.
With roller plunger: LSTE13, LSTE22 and LSTE23.
- To be actuated unidirectionally by 30° cam translation.
With roller lever on stainless steel plunger: LSTE31 ... LSTE33.

LSTE... angular motion heads

- To be actuated by 30° cam translation.
With roller lever: LSTE41 ... LSTE54.
- To be actuated by fully directional translation movement.
With rod or spring lever: LSTE61 ... LSTE72.
- To be actuated multidirectionally.
With spring rod: LSTE91 ... LSTE93.



Bodies with contact block

- ⊕ LS65M00B11, LS65M00D11, LS65M00C11, LS65M00L02, LS65M00B02
- ⊗ LS65M00L20

⊕: Suitable for positive opening operation (IEC 60947-5-1).

Warning! The positive opening operation of limit switch is only guaranteed if the elements noted with ⊕ are fitted.