Latch key safety limit switches
30mm

Movement to be detected

Small Latch (Key), Front or Vertical Translation

Casing

- Plastic
- 30 mm width
- Degree of protection IP65

Actuator

			Right angle key (22 mm mounting)	**Straight key** (22 mm mounting)
NC contact with positive opening operation			⊖	⊖
Actuation speed: maximal / minimal		m/s	0.5 / 0.01	0.5 / 0.01
Min. force: – for insertion of the key		N	15	15
– for extraction of the key		N	10	10
– positive opening operation		N	30	30
Non-overlapping slow action contacts	Catalog number		LS35P80D11-S	LS35P80D11-S
	List price		**$ 43**	**$ 43**
13 21 Zb 14 22	Operation diagram		0 3.8 5.3 21.5 mm 21-22 13-14 4.8; 0 2.0 3.5 21.5 mm 21-22 13-14 3.0	0 3.8 5.3 21.5 mm 21-22 13-14 4.8; 0 2.0 3.5 21.5 mm 21-22 13-14 3.0
Overlapping slow action contacts	Catalog number		LS35P80C11-S	LS35P80C11-S
	List price		**43**	**43**
13 21 Zb 14 22	Operation diagram		0 5.0 6.5 21.5 mm 21-22 13-14 3.4; 0 3.3 4.8 21.5 mm 21-22 13-14 1.7	0 5.0 6.5 21.5 mm 21-22 13-14 3.4; 0 3.3 4.8 21.5 mm 21-22 13-14 1.7
Simultaneous slow action contacts	Catalog number		LS35P80L02-S	LS35P80L02-S
	List price		**43**	**43**
11 21 Zb 12 22	Operation diagram		0 5.0 21.5 mm 11-12 21-22 3.5; 0 3.3 21.5 mm 11-12 21-22 1.8	0 5.0 21.5 mm 11-12 21-22 3.5; 0 3.3 21.5 mm 11-12 21-22 1.8
Weight with 1/2" NPT adaptor (packing per unit)		kg	0.087	0.087

Small Latch (Key)

To order separately	Catalog number		LSA30P08	LSA30P09
	List price		**9**	**11**
Weight (packing per unit)		kg	0.014	0.022

Accessories, special contact arrangement or particular function: please consult us.
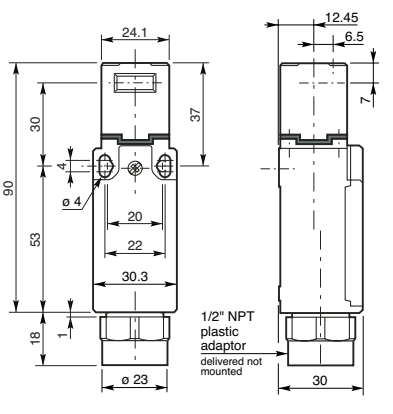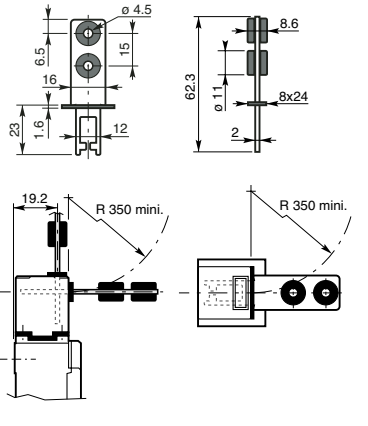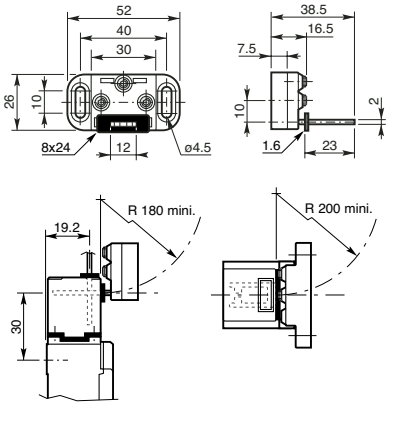
Dimensions (in mm)