


Latch key safety limit switches 30mm

Movement to be detected

Small Latch (Key), Front or Vertical Translation

Casing

- Plastic
- 30 mm width
- Degree of protection IP65

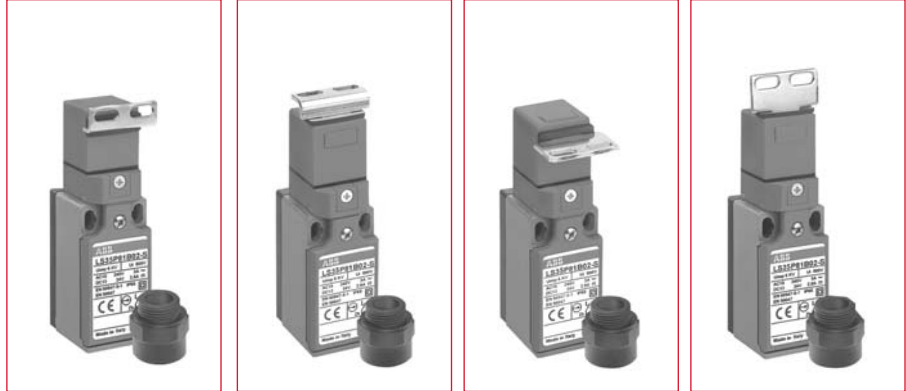

Actuator

Right angle key (22 mm mounting)

Straight key (22 mm mounting)

9 "N.C." contact with positive opening operation Actuation speed: maximal / minimal Min. force: – for insertion of the key – for extraction of the key – positive opening operation		⊕	⊕	⊕
	m/s		0.5 / 0.01	0.5 / 0.01
		N	15	15
		N	10	10
		N	30	30
Non-overlapping slow action contacts	Catalog number	LS35P81D11-S	LS35P81D11-S	LS35P81D11-S
	List price	\$ 52	\$ 52	\$ 52
	Operation diagram			
Overlapping slow action contacts	Catalog number	LS35P81C11-S	LS35P81C11-S	LS35P81C11-S
	List price	52	52	52
	Operation diagram			
Simultaneous slow action contacts	Catalog number	LS35P81L02-S	LS35P81L02-S	LS35P81L02-S
	List price	52	52	52
	Operation diagram			
Weight with 1/2" NPT adaptor (packing per unit)	kg	0.097	0.097	0.097
Small Latch (Key)				
To order separately	Catalog number	LSA30P03	LSA30P04	LSA30P04
	List price	5	5	5
Weight (packing per unit)	kg	0.009	0.009	0.009

Accessories, special contact arrangement or particular function: please consult us.

Dimensions (in mm)

