

Rotative axis safety limit switches 30mm



Movement to be detected


Angular with Lever

Casing


- Plastic
- 30 mm width
- Degree of protection IP65



Lever adjusted to the left
(by user)

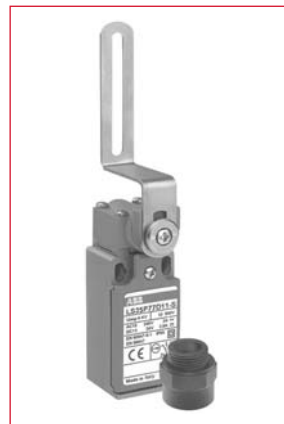

Lever in central position
(factory assembled)

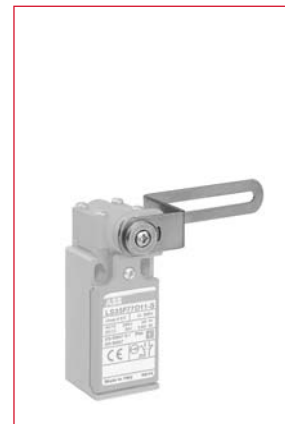

Lever adjusted to the right
(by user)

9

Actuator

Galvanized steel flush mounting right angle lever

"N.C." contact with positive opening operation \rightarrow
 Actuation speed: maximal / minimal m/s
 Min. torque: – actuation N.m
 – positive opening operation N.m

\rightarrow
 0.5 / 0.01
 0.12
 0.60

Non-overlapping slow action contacts	Catalog number List price	LS35P77D11-S \$ 52		
Operation diagram				
Overlapping slow action contacts	Catalog number List price	LS35P77C11-S 52		
Operation diagram				
Simultaneous slow action contacts	Catalog number List price	LS35P77L02-S 52		
Operation diagram				
Weight with 1/2" NPT adaptor (packing per unit) kg		0.117		

Accessories, special contact arrangement or particular function: please consult us.

Dimensions (in mm)

