


Assembled 30mm, IP 65, UL Type 4

Movement to be detected

30° Cam translation movement

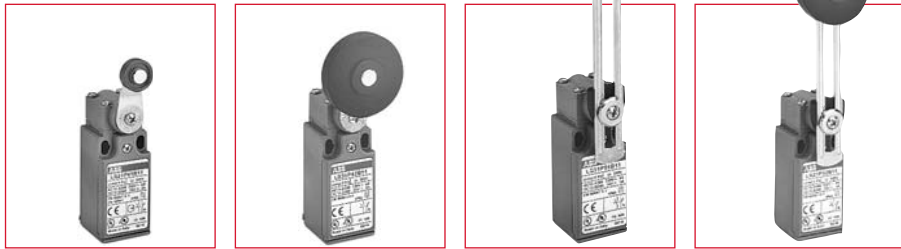

Operating head type

	Ø 18 Polyamide roller lever	Ø 45 Rubber roller lever	Adjustable Ø 18 polyamide roller lever	Adjustable Ø 45 rubber roller lever
Conformity / (N.C. contact with positive opening operation)	EN 50 047			
Maximum actuation speed	m/s 1.5	1.5	1.5	1.5
Min. torque: - actuation	N.m 0.10	0.10	0.10	0.10
- positive opening operation	N.m 0.32	—	—	—

9 Additional technical data

Snap action contacts	Catalog number List price	LS35P41B11 \$ 26	LS35P42B11 \$ 27	LS35P51B11 \$ 27	LS35P52B11 \$ 28
	Operation diagram				
Non-overlapping slow action contacts	Catalog number List price	LS35P41D11 27	LS35P42D11 29	LS35P51D11 28	LS35P52D11 30
	Operation diagram				
Overlapping slow action contacts	Catalog number List price	LS35P41C11 28	LS35P42C11 30	LS35P51C11 29	LS35P52C11 30
	Operation diagram				
Slow action contacts	Catalog number List price	LS35P41L02 28	LS35P42L02 30	LS35P51L02 29	LS35P52L02 30
	Operation diagram				
Slow action contacts	Catalog number List price	LS35P41L20 28	LS35P42L20 30	LS35P51L20 29	LS35P52L20 30
	Operation diagram				
Snap action contacts	Catalog number List price	LS35P41B02 28	LS35P42B02 30	LS35P51B02 29	LS35P52B02 30
	Operation diagram				
Weight (packing per unit)	kg	0.090	0.120	0.100	0.130

Dimensions (mm)

