


Rotative axis safety limit switches

Technical data

Tightening torques

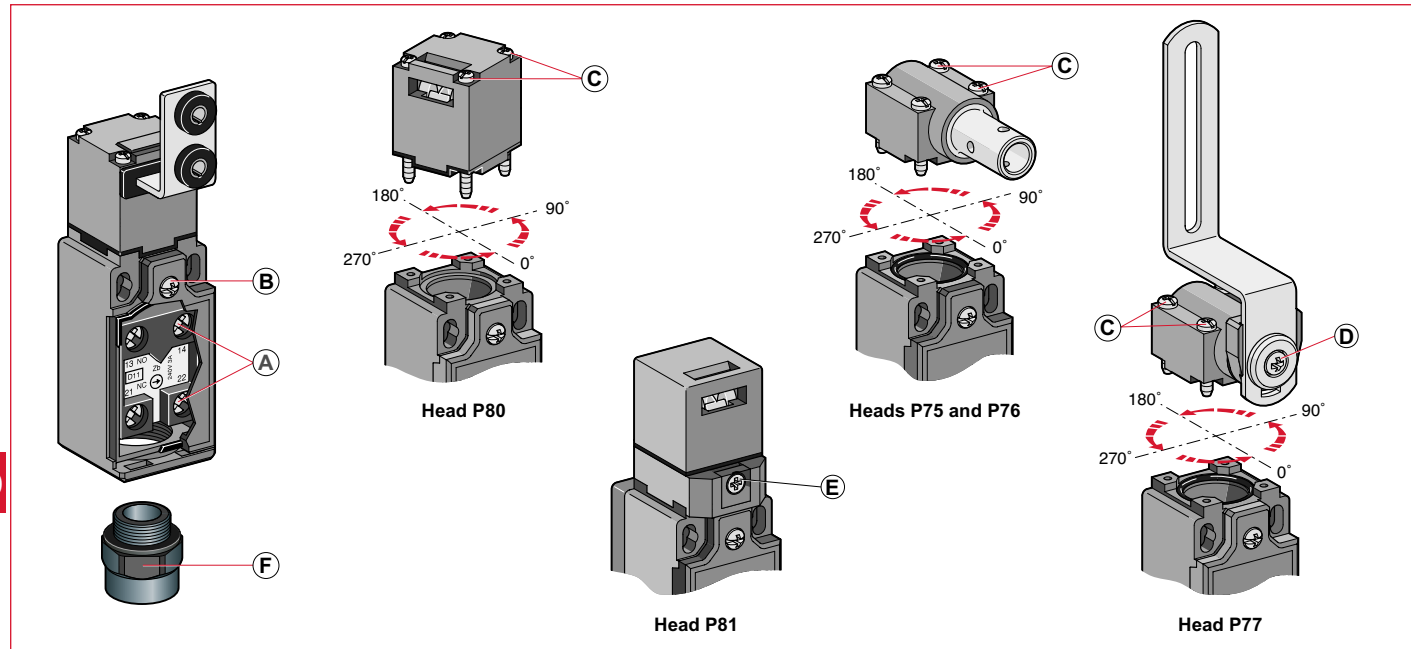

	A		B		C		D		E		F	
	Recommended	Max.	Recommended	Max.	Recommended	Max.	Recommended	Max.	Recommended	Max.	Recommended	Max.
Screws	M3.5 ± pozidriv 2		ø3 ± pozidriv 1		ø3 ± pozidriv 1		M3.5 pozidriv 2		M3 Philips No. 1		-	
Tightening torque	N.m / lb.in	N.m	N.m / lb.in	N.m	N.m / lb.in	N.m	N.m / lb.in	N.m	N.m / lb.in	N.m	N.m / lb.in	N.m
Limit switches												
LS35P80...-S	0.8 / 7	0.9	0.5 / 4.3	0.8	0.5 / 4.3	0.8	-	-	-	-	17 / 150	18
LS35P81...-S	0.8 / 7	0.9	0.5 / 4.3	0.8	-	-	-	-	0.3 / 2.63	0.5	17 / 150	18
LS35P75...-S	0.8 / 7	0.9	0.5 / 4.3	0.8	0.5 / 4.3	0.8	-	-	-	-	17 / 150	18
LS35P76...-S	0.8 / 7	0.9	0.5 / 4.3	0.8	0.5 / 4.3	0.8	-	-	-	-	17 / 150	18
LS35P77...-S	0.8 / 7	0.9	0.5 / 4.3	0.8	0.5 / 4.3	0.8	0.5 / 4.3	0.8	-	-	17 / 150	18

Connecting data of contact blocks

Connecting terminals	M3.5 (+,-) pozidriv 2 screw with cable clamp	
Connecting capacity	1 or 2 x mm ² / AWG	0.5 mm ² / AWG 20 to 2.5 mm ² / AWG 14
Terminal marking	According to EN 50013	