Approximate dimensions

00.00 Millimeters

Fastenings and operations Nº 00 - 01 - 02 - 03 - 04 - 06 - 07 - 08

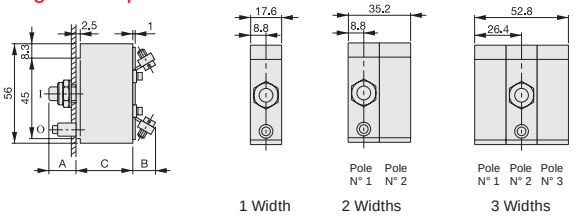

Fastenings / Operations	00	01	02	03	04	05	06	07	08	09
Size A	8	8	8	8	8	17,5	15	15	21	28
Size C	32	32	32	32	32	37	32	32	32	32

Terminations	00	01	02	03	33	43		07	08	09
Size B	15	4	4	12	4	4		4	4	11

Fastenings and operations Nº 05 - 09

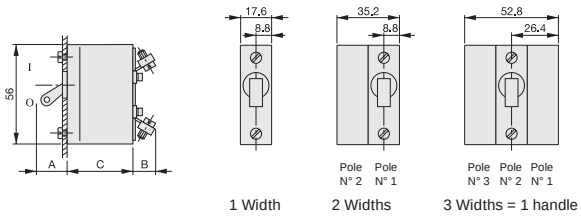

Four-pole circuit breaker :

Fastening and operation Nº 05 only

NOTE :
Neutral on pole N° 1
any
Fastenings and operations

Fastenings and operations (3 poles max. except 02 : 2 poles and 05 : 4 poles)

PROJECTION MOUNTING

SCREW FLUSH MOUNTING Maximum thickness of mounting panel :

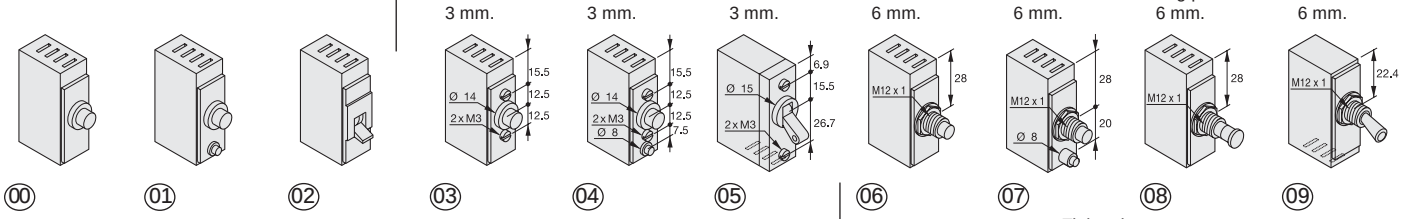

Tightening torque :

1,8 Nm max. | 1,8 Nm max. | 1,8 Nm max. | 3 Nm max.

Terminations

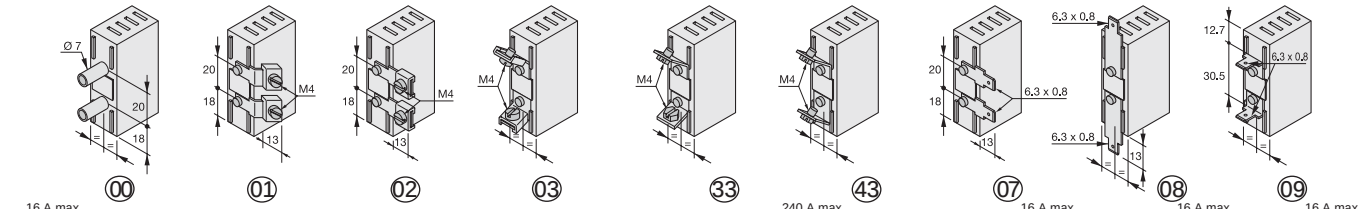

16 A max. Except Fastening 08 | 2 poles max. | 2 poles max. | 240 A max. | 16 A max. 2 poles max. | 16 A max. | 16 A max.