


Approximate dimensions

Enclosed

208V – 600V

Softstarters
Type PST

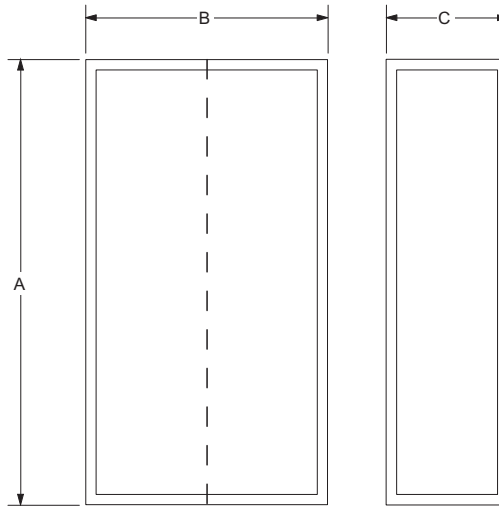

6

Enclosed, 208V – 600V

Combination	In-Line			Inside Delta		
	A	B	C	A	B	C
PST30 – PST72						
Softstarter only	20 x 20 x 12			20 x 20 x 12		
Softstarter with bypass	20 x 20 x 12			20 x 20 x 12		
Softstarter with fused disconnect	20 x 20 x 12			24 x 20 x 12		
Softstarter with circuit breaker	20 x 20 x 12			24 x 20 x 12		
PST85 – PST142						
Softstarter only	24 x 20 x 12			36 x 24 x 12		
Softstarter with bypass	24 x 20 x 12			36 x 24 x 12		
Softstarter with fused disconnect	30 x 30 x 12			42 x 36 x 12		
Softstarter with circuit breaker	24 x 24 x 12			42 x 36 x 12		
PST175 – PST300						
Softstarter only	30 x 30 x 12			42 x 30 x 12		
Softstarter with bypass	30 x 30 x 12			42 x 30 x 12		
Softstarter with fused disconnect	36 x 36 x 12			36 x 36 x 12		
Softstarter with circuit breaker	36 x 36 x 12			36 x 36 x 12		

Combination	In-Line			Inside Delta		
	A	B	C	A	B	C
PSTB370 – PSTB470						
Softstarter with bypass, internal	48 x 36 x 16			48 x 36 x 16		
Softstarter with fused disconnect	48 x 36 x 16			87 x 36 x 24		
Softstarter with circuit breaker	48 x 36 x 16			48 x 36 x 16		
PSTB570 – PSTB720						
Softstarter with bypass, internal	48 x 36 x 16			48 x 36 x 16		
Softstarter with fused disconnect	87 x 36 x 24			87 x 36 x 24		
Softstarter with circuit breaker	48 x 36 x 16			48 x 36 x 16		
PSTB840 – PSTB1050						
Softstarter with bypass, internal	87 x 36 x 24			87 x 36 x 24		
Softstarter with fused disconnect	87 x 48 x 24			87 x 48 x 24		
Softstarter with circuit breaker	87 x 48 x 24			87 x 48 x 24		