


# Assembled IP66, UL Type 4X 40mm

Metal  
Limit switches

Movement to be detected

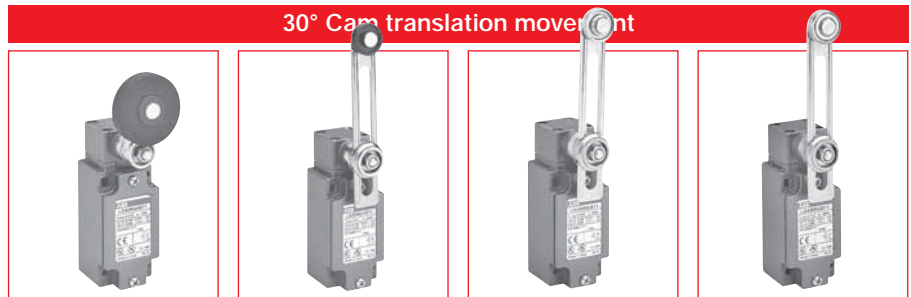

Operating head type

	ø 45 Rubber roller lever	Adjustable ø 22 polyamide roller lever	Adjustable ø 22 stainless steel roller lever	Adjustable ø 22 stainless steel ball-bearing roller lever
Conformity /  (N.C. contact with positive opening operation)				
Maximum actuation speed	m/s 1.5	1.5	1.5	1.5
Min. torque: - actuation	N.m 0.15	0.15	0.15	0.15
- positive opening operation	N.m -	-	-	-

	Catalog number	LS45M44B11	LS45M51B11	LS45M52B11	LS45M53B11
Snap action contacts	List price	\$ 51	\$ 51	\$ 59	\$ 55
	Operation diagram				
Non-overlapping slow action contacts	List price	55	55	63	59
	Operation diagram				
Overlapping slow action contacts	List price	57	57	65	61
	Operation diagram				
Slow action contacts	List price	57	57	65	61
	Operation diagram				
Slow action contacts	List price	57	57	65	61
	Operation diagram				
Snap action contacts	List price	57	57	65	61
	Operation diagram				
Weight (packing per unit)	kg	0.310	0.290	0.300	0.300

Dimensions (mm)

